

# 18AWG 2 CONDUCTOR SHIEDED PLENUM RATED




## DESCRIPTION

**18/2 Stranded Bare Copper Conductors,  
Shielded. CL3P, CMP Plenum Rated, 500ft  
Pull Box**

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 500ft Pull Box

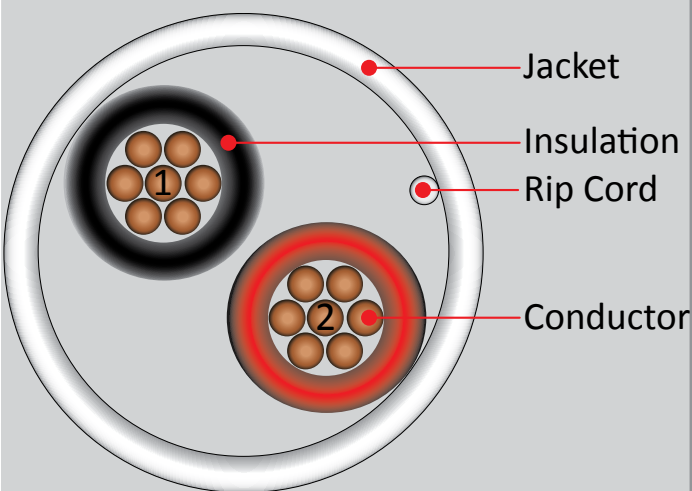

**SKU: 211-182/S/P/5WH**

### APPLICATIONS

Remote Control, Signalling, and Power-Limited circuits per NEC Article 725

Security, sound and audio, speaker cable, public address, intercom, sound reinforcement, alarm and access control circuits and power-limited controls. Where routed in plenum spaces.

### CONSTRUCTION

#### CONDUCTOR

Stranded or solid bare copper as indicated on on individual product specifications.

#### INSULATION

LS-PVC

#### SHIELDING

Overall - Aluminum foil, polyester reinforced tape and stranded tinned copper drain wire.

#### ASSEMBLY

Cabled, with ripcord, and jacketed.

#### JACKET

LS-PVC

LS-PVC WHITE (OTHER COLORS AVAILABLE; MOQ MAY APPLY) (.016 Nom Wall)

0.157" Nominal

22 Lbs/1000 Ft Approx (Net Weight)

### COMPLIANCE

#### FLAME TEST

NFPA 262(UL 910) / CSA FT6

#### CABLE TYPE

CL3P. Also CMP where UL permits (Sizes 16 AWG and smaller.)

#### TEMPERATURE / VOLTAGE

75C / 300V

UL listed to UL 444 and UL 13 as applicable.

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



**www.verticalcable.com**

**Rev. 8/2018**

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.