

16AWG 2 CONDUCTOR STRANDED (65 STRAND)




DESCRIPTION

16AWG, 2 Conductor, Stranded (65 Strand),
PVC Jacket, Pull Box, 500ft. Made in USA.

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications / CMR CL3 Rated

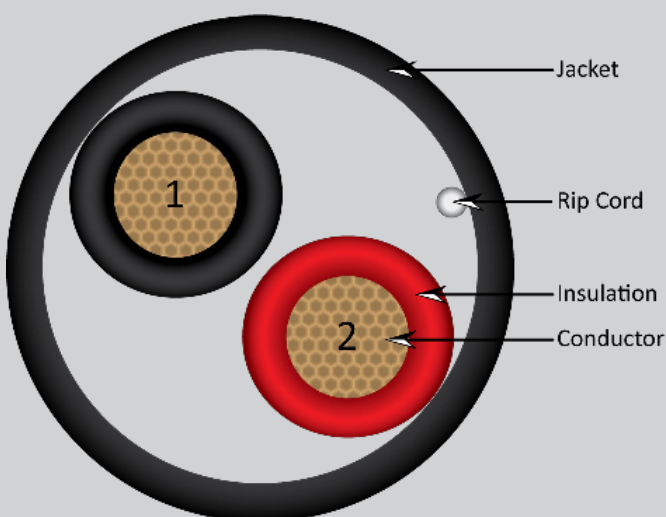

SKU: 309-3020/5BK

Conductor

Material
Size
Stranding

2 Core (Stranded)

Oxygen Free Bare Copper
16 AWG
65 Strand

Insulation

Material
Thickness
Colors

PVC
.0095"
Black, Red

Jacket

Material
Thickness
Outer Diameter
Color

PVC
.015"
0.180"
Black

Ripcord

Material

High Strength Polyester

Electrical Performance

Rated Temperature
Voltage Rating
DC Resistance

-20C° to 75C°
300 Volt RMS
4.18Ω/1000FT


Flame Rating
Approvals

UL 1666
UL Type CMR, CL3R
UL Subject 13, 444
NEC Article 725, 800

Marking on Jacket

4010346 16AWG 2 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET



MADE IN USA

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 042018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.