

# 16AWG 2 CONDUCTOR STRANDED (65 STRAND)




## DESCRIPTION

16AWG, 2 Conductor, Stranded (65 Strand),  
PVC Jacket, Pull Box, 1000ft. Made in USA.

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound / Audio
- Power Limited Control Circuits
- Indoor Applications / CMR CL3 Rated

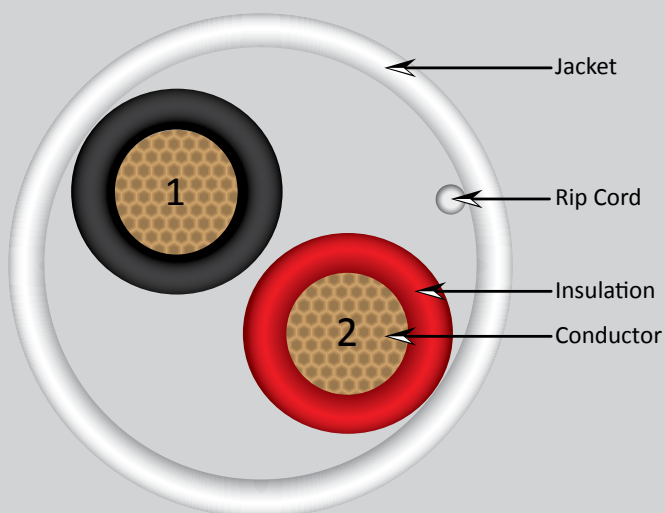

## SKU: 309-3031/WH

### Conductor

Material  
Size  
Stranding

### 2 Core (Stranded)

Oxygen Free Bare Copper  
16 AWG  
65 Strand

### Insulation

Material  
Thickness  
Colors

PVC  
.0095"  
Black, Red

### Jacket

Material  
Thickness  
Outer Diameter  
Color

PVC  
.015"  
0.180"  
White

### Ripcord

Material

High Strength Polyester

### Electrical Performance

Rated Temperature  
Voltage Rating  
DC Resistance

-20C to 75C  
300 Volt RMS  
4.18Ω/1000FT

Flame Rating  
Approvals

UL 1666  
UL Type CMR, CL3  
UL Subject 13, 444  
NEC Article 725, 800

### Marking on Jacket

4010346 16AWG 2 COND. STRANDED OXYGEN FREE 75C CMR c(ETL)us  
FT4 CL3 ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET SEQUENTIAL FOOT  
MARKERS ON JACKET

**MADE IN USA**

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.