

16AWG 4 CONDUCTOR STRANDED (65 STRAND)



SKU: 209-2316/PR

DESCRIPTION

16AWG, 4 Conductor, Stranded (65 Strand),
PVC Jacket, Pull Box, 500ft.

Conductor	4 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	16 AWG
Stranding	65 Strand
Strand Diameter	0.16 mm

Insulation	PVC
Material	PVC
Average Thickness	0.31 mm
Min. Point Thickness	0.27 mm
Insulation Diameter (±0.05mm)	2.10 mm
Assembly Diameter (±0.05mm)	5.10 mm

Jacket	PVC
Material	PVC
Color	White
Average Thickness	0.60 mm
Min. Point Thickness	0.54 mm
Outer Diameter (±0.1mm)	6.30 mm
Insulation Color	Black, Red, Green, White


Ripcord	Nylon (150D)
Material	Nylon (150D)
Electrical Performance	
Rated Temperature (°C)	75
Voltage Rating	300V
Reference Standard	ETL, CMR, CL3

Mechanical Characteristics	
Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket
VERTICAL 4001453 cETLus AUDIO CABLE 16 AWG 4 COND 65 STRANDED
OXYGEN FREE CMR FT4 CL3 RoHS XXXFT

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications

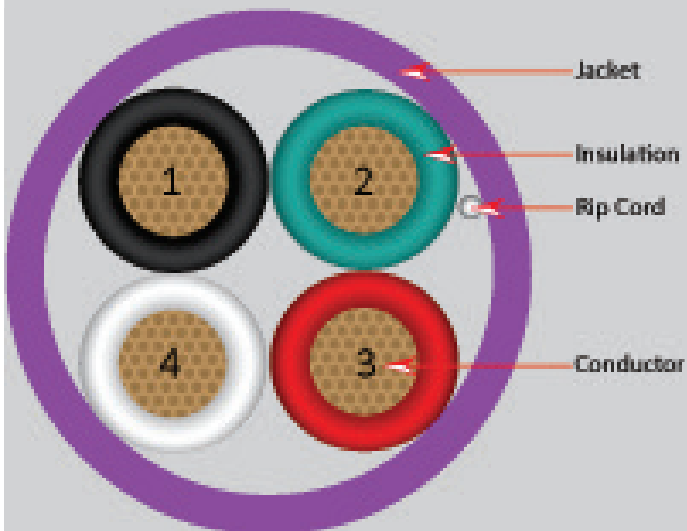

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 01/2019

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.