

RG6 STANDARD SHIELD COAXIAL CABLE (CM Rated)



SKU: 107-1237WH6S1RB

Physical Characteristics

Conductor

Conductor Material	Copper Clad Steel (Solid)
Size	18 AWG
Construction	$\phi 1.024 \pm 0.10$ mm

Insulation

Material	Foamed PE
Diameter	$\phi 4.57 \pm 0.15$ mm
Min. Thickness	1.71 mm
Color	White

First Shield Outer Conductor

Material	Aluminum/PET-Foil Bonded
----------	--------------------------

Second Shield Outer Conductor

Material	Aluminum Wire
Size	0.16 mm
Construction	16x5x0.20 mm 60% Coverage

Jacket

Material	PVC
Diameter	6.86 ± 0.20 mm
Min. Thickness	0.82 mm
Color	White

Electrical Specifications (20°C)


Conductor DC Resistance	$\leq 120 \Omega/\text{km}$
Nominal Capacitance	$52 \pm 2 \text{ pF/m}$
Impedance	$75 \pm 3 \text{ Ohms}$

DESCRIPTION

RG6 Standard Shield, 18AWG Solid CCS Conductor, Aluminum Foil & 60% Aluminum Braid Coverage

FEATURES

- High-Grade RG6 Coaxial Cable
- Fully Sweep-Tested to 3GHz
- 18AWG Solid Solid Copper-Clad Steel
- Aluminum/PET-Foil Bonded
- 60% Aluminum Braid Shield
- CM, CATV, CL2 Rated
- ETL, RoHS Compliant
- Suitable for Digital HDTV Applications, CATV and Digital Satellite Installations
- Supplied in 1000ft Reel in a Box

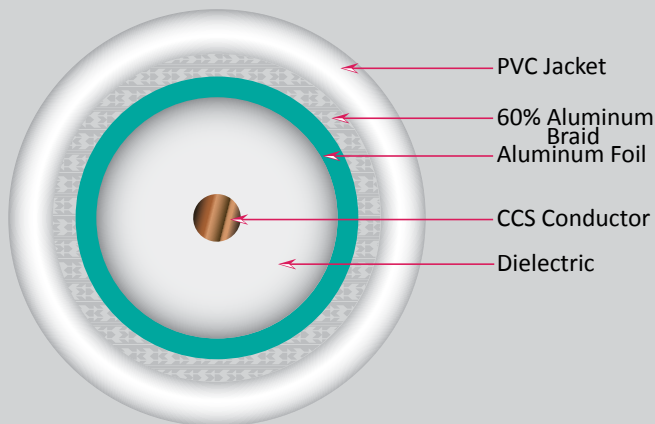

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 7/2018

Subject to change without notice