

18AWG 2 CONDUCTOR FIRE ALARM CABLE (FPLP-PLENUM) UNSHIELDED




SKU: 315-182/P Series

DESCRIPTION

Fire Alarm Cable, 18/2, Solid, Unshielded, FPLP (Plenum), 1000ft Spool

FEATURES

- Fire Alarm Cable
- FPLP (Power-Limited Fire Alarm Plenum Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 18AWG 2 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- Spool Dimensions: 6'H x 12'D
- 1000ft Spool

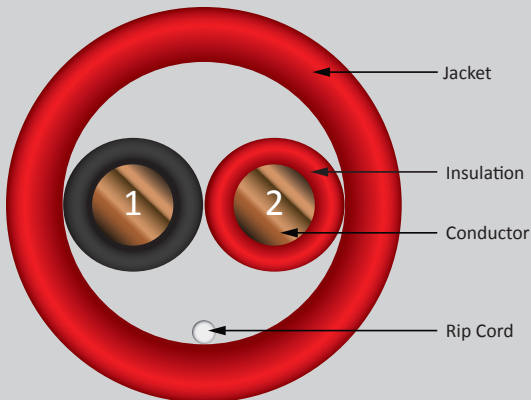

Conductor

Material 18AWG Solid Bare Copper
Conductors 2 Conductor

Insulation

Thickness (mm) PVC 0.229
Colors Red, Black

Rip Cord

Yes

Shield

None

Drain

None

Jacket

Thickness (mm) FR-PVC -
Overall Diameter (mm) 3.94
Color Red

Electrical & Physical Properties

Operating Temperature Rating (°C) -2 to +60
Operating Voltage Rating (V RMS) 300
Resistance @20°C (Ω/1000ft) 6.7
Weight (lb/1000ft) 19

Ratings/Approvals

NEC Article 760, NFPA 262 Steiner Tunnel Smoke and Flame Test, UL 1424, ETL Listed, RoHS Compliant
Does not comply with NYC LL5 (Local Law 5)

Jacket Print

18 AWG 2C PLENUM FIRE ALARM CABLE (ETL) US TYPE FPLP FILE NUMBER MADE IN USA 0000FT [JULIAN DATE/YR]

Colors Available

Red, Blue, Yellow



VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York

www.verticalcable.com

Rev. 10/2015

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.