

12AWG 2 CONDUCTOR FIRE ALARM CABLE (FPLP-PLENUM) UNSHIELDED




DESCRIPTION

Fire Alarm Cable, 12/2, Solid, Unshielded, FPLP (Plenum), 1000ft Spool

FEATURES

- Fire Alarm Cable
- FPLP (Power-Limited Fire Alarm Plenum Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 12AWG 2 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- 1000ft Spool

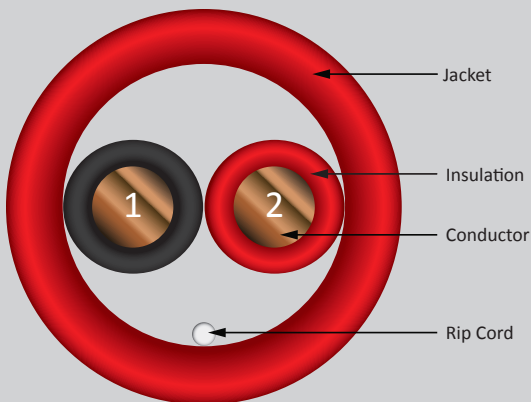

SKU: 315-122/P Series

Conductor

Material: 12AWG Solid Bare Copper
Conductors: 2 Conductor

Insulation

Thickness (mm): PVC 0.381
Colors: Red, Black

Rip Cord Shield Drain

Polyester Rip Cord
None
None

Jacket

Thickness (mm): FR-PVC 0.381
Overall Diameter (mm): 5.842
Color: Red

Electrical & Physical Properties

Operating Temperature Rating: -20°C To +60°C
Operating Voltage Rating: 300 V RMS
DC Resistance: 1.62 Ω/MFT @ 20°C Max.
Nom. Capacitance: 25.9 pF/FT
Data Performance Standards: NEC Article 760, UL Subject 1424, Type FPLP
Safety Listing Standard: UL 1424
Insulation Colors: Black & Red
Jacket Color: Red

Ratings/Approvals

NEC Article 760, ETL listed or (ETL) us listed for guaranteed performance.

Jacket Print

12 AWG 2C PLENUM FIRE ALARM CABLE (ETL)us TYPE FPLP 4010346
MADE IN USA
[JULIAN DATE/YR] [LOT#] [XXXX FT]



VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York

www.verticalcable.com

Rev. 3/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.