

# 12AWG 2 CONDUCTOR FIRE ALARM CABLE (FPLR-RISER) UNSHIELDED




## DESCRIPTION

Fire Alarm Cable, 12/2, Solid, Unshielded, FPLR (Riser), 1000ft Spool

## FEATURES

- Fire Alarm Cable
- FPLR (Power-Limited Fire Alarm Riser Cable)
- Fire protective signal circuit
- Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems
- 12AWG 2 Conductor
- 100% Solid Bare Copper Conductors
- Unshielded
- MADE IN USA
- ETL Listed, RoHS Compliant
- 1000ft Spool

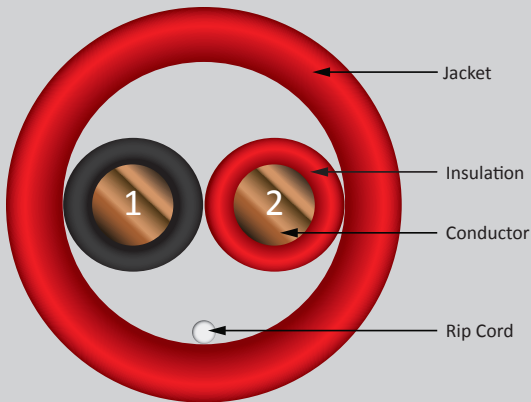

## SKU: 315-122/R Series

### Conductor

Material: 12AWG Solid Bare Copper  
Conductors: 2 Conductor

### Insulation

Thickness (mm): PVC 0.381  
Colors: Red, Black

### Rip Cord Shield Drain

Polyester Rip Cord  
None  
None

### Jacket

Thickness (mm): FR-PVC 0.381  
Overall Diameter (mm): 5.842  
Color: Red

### Electrical & Physical Properties

Operating Temperature Rating: -20°C To +60°C  
Operating Voltage Rating: 300 V RMS  
DC Resistance: 1.62 Ω/MFT @ 20°C Max.  
Nom. Capacitance: 25.9 pF/FT  
Data Performance Standards: NEC Article 760, UL Subject 1424, Type FPLR  
Safety Listing Standard: UL 1424  
Insulation Colors: Black & Red  
Jacket Color: Red

### Ratings/Approvals

NEC Article 760, ETL listed or (ETL) us listed for guaranteed performance.

### Jacket Print

12 AWG 2C PLENUM FIRE ALARM CABLE (ETL)us TYPE FPLR 4010346  
MADE IN USA  
[JULIAN DATE/YR] [LOT#] [XXXX FT]



**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York

[www.verticalcable.com](http://www.verticalcable.com)

Rev. 3/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.