

14AWG 4 CONDUCTOR PLENUM RATED (SHIELDED)



SKU: 211-144/S/P/WH

DESCRIPTION

**14/4 Stranded Bare Copper Conductors,
Shielded with an overall jacket, 1000ft
Spool, CMP/CL3P**

FEATURES


- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- UL Listed to UL444 and UL13, RoHS
- 1000ft Spool

CONSTRUCTION: 14 AWG 19 STRAND BARE COPPER 4
CONDUCTORS TWISTED
INSULATION: LS-PVC
COLOR CODE: BLACK, RED, WHITE, GREEN
SHIELD/DRAIN: ALUMINUM/POLYESTER FOIL (OUT); 24AWG 7
STRAND TINNED COPPER DRAIN
ASSEMBLY: 4 CONDUCTORS TWISTED, SHIELDED AND JACKETED
JACKET: LS-PVC WHITE (OTHER COLORS AVAILABLE; MOQ MAY
APPLY)
DIAMETER: 0.255" Nominal
CABLE WT: 72 Lbs/1000Ft Approx (Net Weight)
PRINT LEGEND: E57497 CL3P/FPLP 14AWG (UL) MADE IN USA RoHS
COMPLIANT
NEC: CL3P/FPLP
FOR RISER RATED VERSION GO TO SPEC. NO. R60024
COMPLIANCE: UL 13 CL3P by (UL) / NEC ARTICLE 725 / RoHS
FLAME TEST: NFPA 262(UL 910) / CSA FT6
CAPACITANCE: 53.6 pF/ft Nominal
VEL OF PROP: 55%
IMPEDANCE: 34 OHMS
RESISTANCE: 2.73 OHMS D.C. PER 1000 FT @ 68 DEG. F Maximum
TEMP/VOLTAGE: 75C / 300V
MISC: MADE IN USA

MARKING ON JACKET:

14 AWG 4/C E57497 C(UL)US CMP/CL3P/FPLP 75C -- CMP FT6 MADE
IN USA ROHS-2 COMPLIANT

FOOTAGE MARKS: FOOTMARK IN ASCENDING ORDER

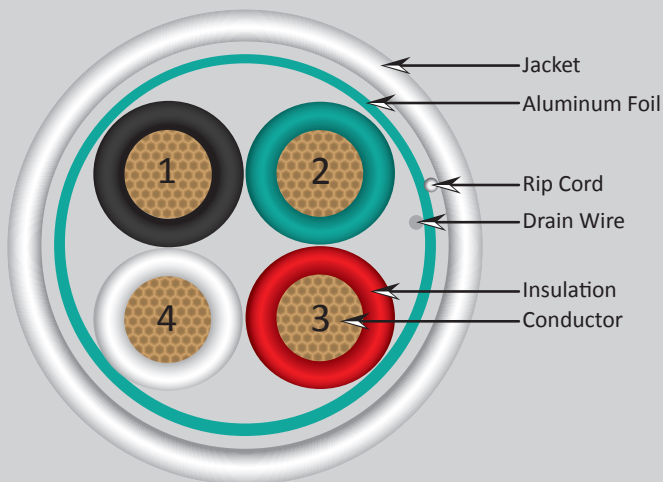

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 5/2019

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.