

16AWG 2 CONDUCTOR STRANDED (65 STRAND) PLENUM RATED



SKU: 309-3025/P/5BK

DESCRIPTION

16AWG, 2 Conductor, Stranded Bare Copper (65 Strand), PVC Jacket
Pull Box, 500FT, Made in USA

Conductor
Material 2 Core (Stranded)
Annealed High-Strand Oxygen Free
Bunched Bare Copper
Size 16 AWG
Stranding 65x34

Insulation
Material PVC
Thickness .0095"
Colors Black, Red

Jacket
Material PVC
Thickness 0.020"
Nominal Outer Diameter .200"
Color Black

Ripcord
Material High Strength Polyester

Electrical Performance
Rated Temperature -20C° to 75C°
Voltage Rating 300 Volt RMS
DC Resistance 4.18Ω/1000 FT


Flame Rating NFPA 262
Approvals UL Type CMP, CL3P
UL Subject 13, 444
CSA Type FT4
NEC Article 725, 800

Marking on Jacket
4010346 16AWG 2 COND. STRANDED OXYGEN FREE 75C CMP c(ETL)us
FT4 CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

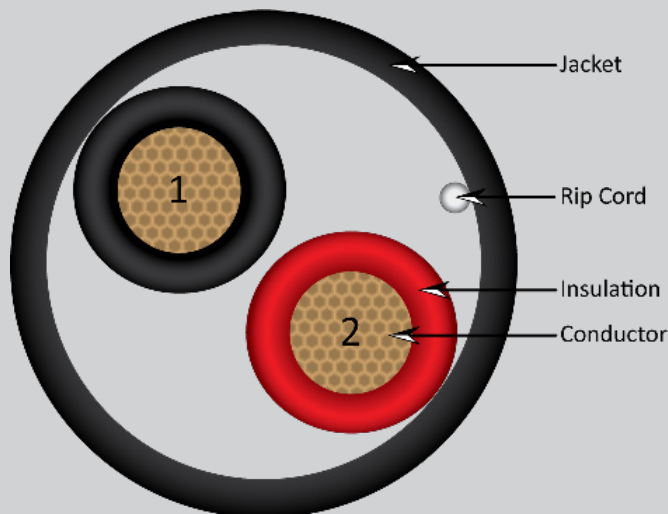

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 05/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.