

# 18AWG 6 CONDUCTOR PLENUM RATED (CMP)



**SKU: 211-186ST/P/WH**  
**211-186ST/P/5WH**

## DESCRIPTION

18/6 Stranded Bare Copper Conductors,  
Unshielded with an overall jacket  
CMP PLENUM RATED

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

### Conductor

Material	Stranded Bare Copper
Size	18AWG
Stranding	7
Conductors	6 Conductor

### Insulation

Material	Low Smoke Flame Retardant
Thickness	0.009 in (0.228mm) Nominal
Colors	Black, White, Red, Green

### Jacket


Material	Low Smoke Flame Retardant
Thickness	0.015in (0.381mm) Nominal
Overall Diameter	0.210in (5.334mm) Nominal
Color	White

### Electrical & Physical Properties

Voltage	300V RMS
DC Resistance per Conductor @ 20°C	6.92Ω/1000ft
Nominal Capacitance:	25.4pf/ft
Nominal Impedance:	73Ω
Nominal Velocity of Propagation:	55%

### Ratings/Approvals

NEC Article 800, Type CMP FT6  
c(ETL)US or c(UL)us, RoHS Compliant  
UL Subject 444

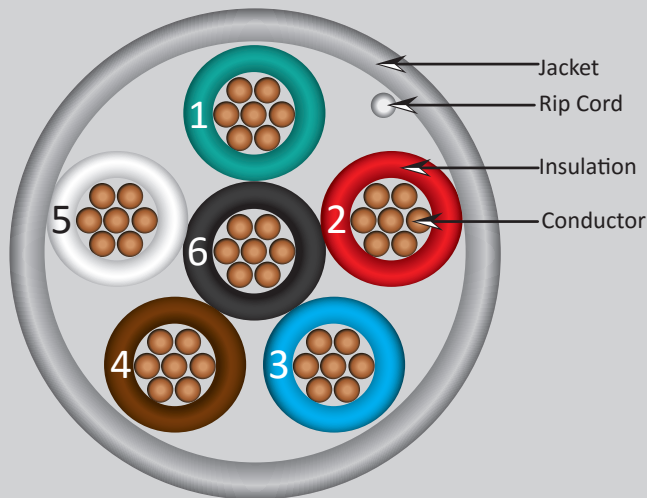

Available in 500ft & 1000ft  
Check availability

## Made in the USA

## VERTICAL CABLE

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 9/2019

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.