

CAT5E MODULAR PLUG

3 PRONG 3u" GOLD PLATED

(SHIELDED)




SKU: 011-017-100

DESCRIPTION

Category 5E, RJ45 Shielded Modular Plug,
8P 8C, 3 Micro-inches Gold Plated.

FEATURES

- 3 Micro-Inches Gold Plated 3 prong
- For Shielded Solid Cable
- 24AWG - 26AWG Wire
- Rohs Compliant



ELECTRICAL:

1. VOLTAGE RATING: 150 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. 1000V D.C. or A.C. PEAK; ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER. 1500V D.C. OR A.C. PEAK; ALL CONTACTS CONNECTED TOGETHER TO SHIELD, (HOUSING/MOUNTING PLATE) IF PRESENT. @ 0.5mA 50 Hz OR 60 Hz A MINUTE

MECHANICAL:


1. RETENTION STRENGTH: 50N MIN. FOR 60S±5S
2. OPERATING LIFE: 750 CYCLES MIN.
3. INSERTION FORCE: 30N MAX.

ENVIRONMENTAL:

1. OPERATION: -25°C~+55°C GB 10753-89
2. STORAGE: -10°C~+40°C RELATIVE HUMIDITY<80%, GB 10753-89
3. STORAGE TIME: 12 MONTHS

CHARACTERISTICS:

PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.89-0.99 MM AND A MAXIMUM DIAMETER CABLE JACKET OF 5.30 MM

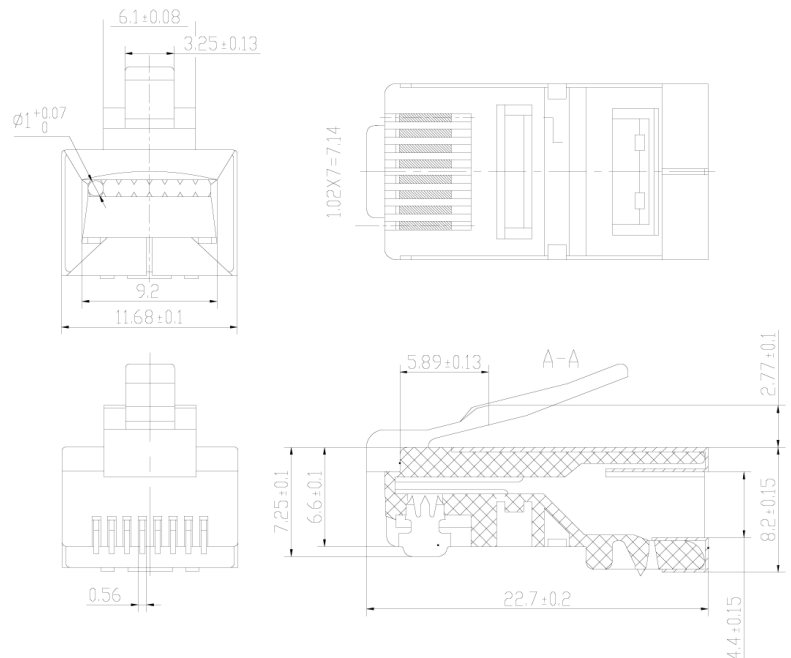

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office
845 391-8318 New York Office

www.verticalcable.com

Rev. 03/2020

Subject to change without notice.