

CAT5E OUTDOOR CABLE

F/UTP (CELL TOWER CABLE)




DESCRIPTION

Category-5E, F/UTP w/Drain Wire, 8-Conductor, Outdoor UV Rated Outer Jacket, Solid-Bare Copper.

FEATURES

- Category-5E Shielded Twisted Pair
- Ideal for Cell Tower Applications
- High-Performance Data Cable
- UV Rated LLDPE Outer Jacket
- Aluminum Foil protects from EMI/RFI
- Dual Jacket for added resistance
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- Exceeds TIA/EIA-568.2-D
- ETL Listed, RoHS Compliant
- 1000ft Wooden Spool or Reel in Box

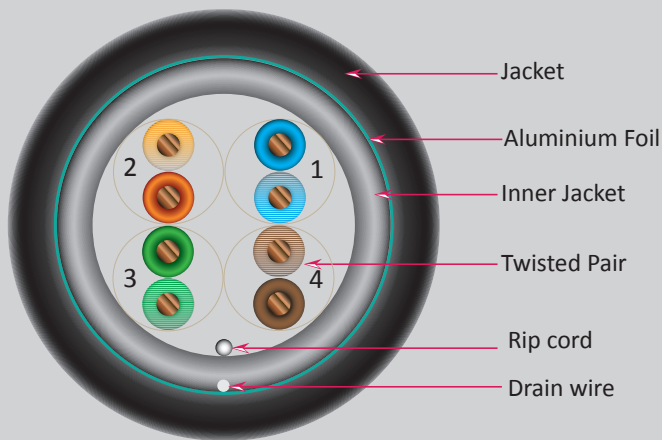

SKU: 059-494/WS/CWT, 059-494/RB/CWT

Technical Data

Rated Temperature	-40~70 °C
Rated Voltage	60V
Flammability Test	IEC-332-1
Product Standard Certification	CMX
Application	Wiring LAN Cell Tower

Conductor

Size Solid Bare Copper 24 AWG (0.51mm)

Insulation

Average Thickness	0.008" (0.208mm)
Insulation Diameter	0.036" (0.91±0.005mm)
Twisted Pair Diameter	0.076" (1.92±0.01)

Colors of Pairs

Pair 1	Blue, White-Blue
Pair 2	Orange, White-Orange
Pair 3	Green, White-Green
Pair 4	Brown, White-Brown

Assembly Diameter

0.15" (3.80mm)

Inner Jacket (Gray)

Average Thickness	0.016" (0.40mm)
Outer Diameter	0.189" (4.80±0.10mm)
Rip Cord	Yes

Drain Wire (Tinned Copper)

7/0.16

Aluminum Foil

Yes

Outer Jacket (Black)

Average Thickness	0.028" (0.70mm)
Outer Diameter	0.26" (6.60±0.10mm)

Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	≥10.6
Aging Elongation (%)	≥300
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-40±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED F/UTP 4PR 24AWG OUTDOOR DIRECT BURIAL (DRY) UV LLDPE CAT5E 350MHz TIA/EIA - 568.2-D RoHS XXXFT (SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

VERTICAL CABLE

800.749.2447 Florida
951.696.7772 California
845.391.8318 New York



www.verticalcable.com

Rev. 05/2020

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.

CAT5E OUTDOOR CABLE

F/UTP (CELL TOWER CABLE)

PERFORMANCE

Electrical Characteristics:

1.0-350.0MHz Impedance (Ohms±15)	100
1.0-350.0MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/100m)	≤330
Max. Conductor DC Resistance 20°C (ohms/km)	95
Resistance Unbalance (%)	≤5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (Min dB)
1	20.0	2.0	68.3
4	23.0	4.1	59.3
8	24.5	5.8	54.8
10	25.0	6.5	53.3
16	25.0	8.2	50.3
20	25.0	9.3	48.8
25	24.3	10.4	47.3
31.25	23.6	11.7	45.9
62.5	21.5	17.0	41.4
100	20.1	22.0	33.8
200	18.0	32.4	35.5
240	17.4	63.0	33.8
300	16.8	41.0	31.2
350	16.3	44.9	30.1

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(db/100m)	PSELFEXT Min(db/100m)
1	66.3	63.8	60.8
4	57.3	51.7	48.7
8	52.8	45.7	42.7
10	51.3	43.8	40.8
16	48.3	39.7	36.7
20	46.8	37.7	34.8
25	45.3	35.8	32.8
31.25	43.9	33.9	30.9
62.5	39.4	27.8	24.8
100	36.3	23.8	21.0
200	31.8	17.7	14.7
240	30.6	16.2	13.2
300	29.2	14.2	11.2
350	28.1	12.9	9.9

VERTICAL CABLE

800.749.2447 Florida

951.696.7772 California

845.391.8318 New York

www.verticalcable.com

Rev. 05/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.