

# 18AWG 3 CONDUCTOR STRANDED CABLE (SHIELDED)




**SKU: 211-183ST/S/5GY, 211-183ST/S/5WH  
211-183ST/S/GY, 211-183ST/S/WH**

## DESCRIPTION

**18/3 Stranded Bare Copper Conductors,  
Shielded with an overall jacket, CM, CL2**

## FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- ETL Listed, RoHS Compliant
- Available in 500ft Pull Box, 1000ft Spool
- Available in White and Gray colors

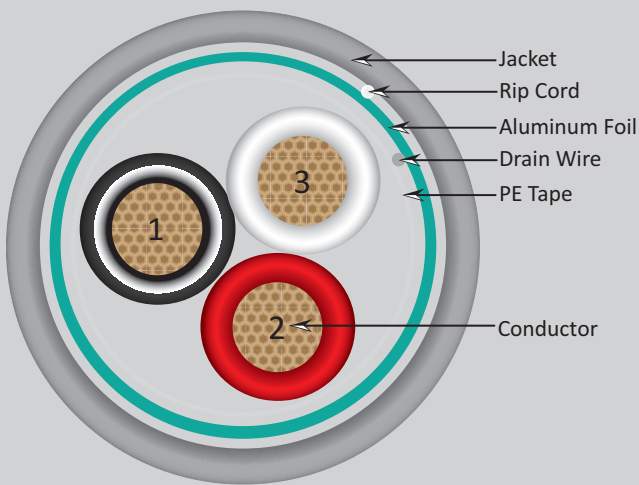

### Conductor

Material	Stranded Bare Copper
Size	18AWG
Stranding (mm)	16 x 0.24
Conductors	3 Conductor

### Insulation

Material	PVC
Average Thickness	0.02" (0.50 mm)
Insulation Diameter	0.067" (1.70±0.05mm)
Colors	Black, Red, White
Al Foil	Yes

### Jacket

Material	PVC
Average Thickness	0.02" (0.50 mm)
Overall Diameter	0.197" (5.00±0.1mm)
Rip Cord	Nylon

### Electrical & Physical Properties

Voltage	300V RMS
Rated Temperature	75°C

### Ratings/Approvals

ETL, c(ETL)US, RoHS Compliant, CM, CL2

### Marking on Jacket

VERTICAL 4001453 cETLus CM/CL2 18AWG 3C STRANDED 75C SUN RES  
RoHS

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 06/2020

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.