

# 16AWG 2 CONDUCTOR STRANDED (7 STRAND) PLENUM RATED, SHIELDED




## DESCRIPTION

**16AWG, 2 Conductor, Stranded Bare Copper (7 Strand), FR-PVC Jacket  
Pull Box, 500FT, Made in USA**

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

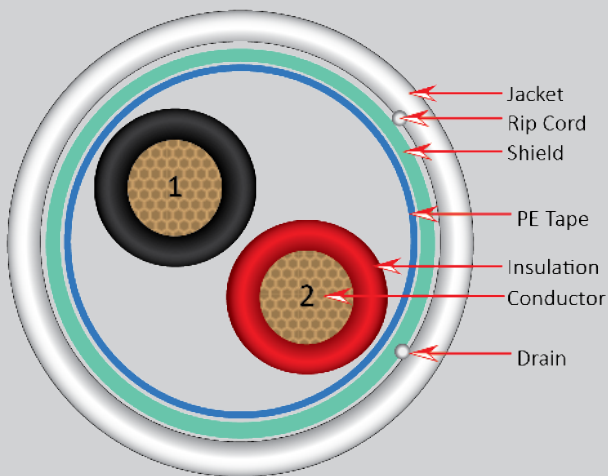

## SKU: 309-3038/SP/5WH

<b>Conductor</b>	2 Core (Stranded)
Product Description	FR Low Smoke Polyvinyl Chloride (PVC) insulated bare copper conductors jacketed with an overall PVC FR-PVC jacket
Size	22 AWG
Stranding	7
CAP (pF/FT)	65
<b>Shield</b>	Low Smoke Aluminum Mylar
Drain Wire	24 AWG Tinned Copper
<b>Insulation</b>	PVC
Material	0.010" (0.25mm)
Thickness	Black, Red, White, Green, Brown, Blue
Colors	
<b>Jacket</b>	FR-PVC
Material	0.015" (0.38mm)
Thickness	0.187" (4.75mm)
Nominal Outer Diameter	White
Color	
<b>Ripcord</b>	High Strength Polyester
Material	
<b>Electrical Performance</b>	
Rated Temperature	-25C° to 75C°
Voltage Rating	300 Volt
Flame Rating	NFPA 262
Approvals	CMP(UL444) NEC 800 CL3P (UL13) NEC 72

**Marking on Jacket**  
4010346 16 AWG 2COND. PLENUM SHIELDED STRANDED 75C CMP  
c(ETL)us FT4 CL3P ROHS COMPLIANT MADE IN USA PO##### OPER###  
CL## [#####FT/ ###FT]

SEQUENTIAL FOOT MARKERS ON JACKET

Approximate shipping weight: 51LBS

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.