



# 18AWG 2 CONDUCTOR STRANDED (7 STRAND) RISER, UNSHIELDED


**SKU: 309-3072/GY**

## DESCRIPTION

18AWG, 2 Conductor, Stranded Bare Copper  
(7 Strand), FR-PVC Jacket  
Pull Box, 1000FT, Made in USA

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

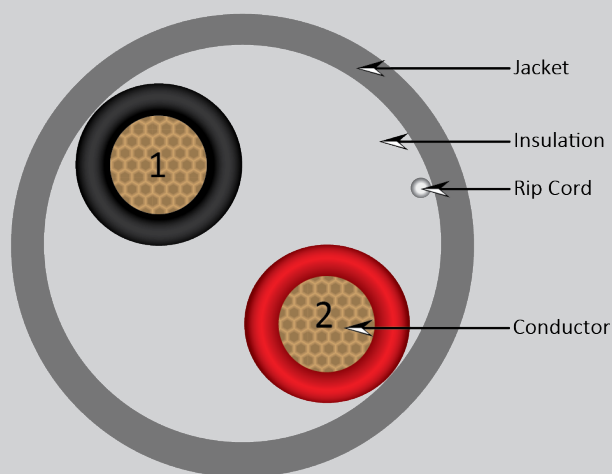

### Conductor

Product Description

2 Core (Stranded)  
FR Low Smoke Polyvinyl  
Chloride (PVC) insulated bare  
copper conductors jacketed with  
an overall PVC FR-PVC jacket

Size  
Stranding  
CAP (pF/FT)

22 AWG  
7  
65

### Shield

Drain Wire

Low Smoke Aluminum Mylar  
24 AWG Tinned Copper

### Insulation

Material  
Thickness  
Colors

PVC  
0.009" (0.23mm)  
Black, Red, White, Green, Brown, Blue

### Jacket

Material  
Thickness  
Nominal Outer Diameter  
Color

FR-PVC  
0.015" (0.38mm)  
0.161" (4.09mm)  
White

### Ripcord

Material

High Strength Polyester

### Electrical Performance

Rated Temperature  
Voltage Rating

-25C° to 75C°  
300 Volt

Flame Rating  
Approvals

NFPA 262  
CMP(UL444) NEC 800  
CL3P (UL13) NEC 72

### Marking on Jacket

4010346 18AWG 2 COND. RISER UNSHIELDED STRANDED 75C CMP  
c(ETL)us FT4 CL3P ROHS COMPLIANT MADE IN USA PO##### OPER###  
CL## [####FT/ ####FT]

SEQUENTIAL FOOT MARKERS ON JACKET

Approximate shipping weight: 51LBS

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



**www.verticalcable.com**

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.