

18AWG 2 CONDUCTOR STRANDED (7 STRAND) PLENUM RATED, SHIELDED




DESCRIPTION

18AWG, 2 Conductor, Stranded Bare Copper (7 Strand), FR-PVC Jacket
Pull Box, 500FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

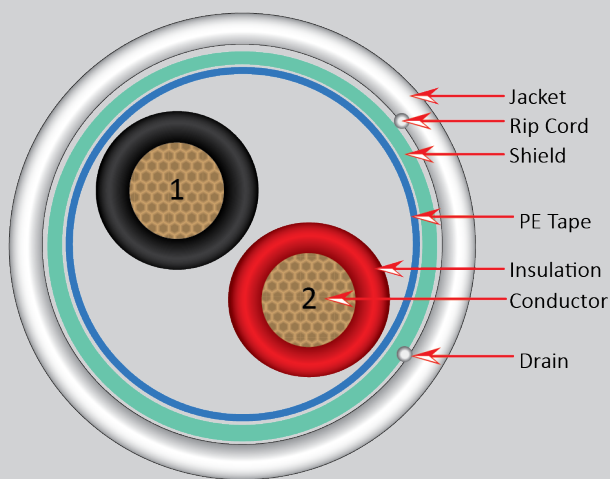

SKU: 309-3077/SP/5WH

Conductor	2 Core (Stranded)
Product Description	FR Low Smoke Polyvinyl Chloride (PVC) insulated bare copper conductors jacketed with an overall PVC FR-PVC jacket
Size	22 AWG
Stranding	7
CAP (pF/FT)	65
Shield	Low Smoke Aluminum Mylar
Drain Wire	24 AWG Tinned Copper
Insulation	PVC
Material	0.009" (0.23mm)
Thickness	Black, Red, White, Green, Brown, Blue
Colors	
Jacket	FR-PVC
Material	0.015" (0.38mm)
Thickness	0.162" (4.11mm)
Nominal Outer Diameter	White
Color	
Ripcord	High Strength Polyester
Material	
Electrical Performance	
Rated Temperature	-25C° to 75C°
Voltage Rating	300 Volt
Flame Rating	NFPA 262
Approvals	CMP(UL444) NEC 800 CL3P (UL13) NEC 72

Marking on Jacket
4010346 18 AWG 2COND. PLENUM SHIELDED STRANDED 75C CMP
c(ETL)us FT4 CL3P ROHS COMPLIANT MADE IN USA PO##### OPER###
CL## [#####FT/ ###FT]

SEQUENTIAL FOOT MARKERS ON JACKET

Approximate shipping weight: 51LBS

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.