



18AWG 4 CONDUCTOR STRANDED (7 STRAND) RISER, UNSHIELDED


SKU: 309-3082/5WH

DESCRIPTION

18AWG, 4 Conductor, Stranded Bare Copper
(7 Strand), FR-PVC Jacket
Pull Box, 500FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

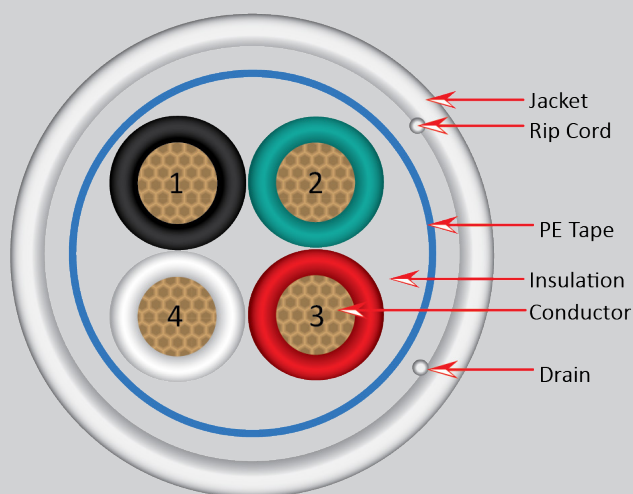

Conductor

Product Description

4 Core (Stranded)
FR Low Smoke Polyvinyl
Chloride (PVC) insulated bare
copper conductors jacketed with
an overall PVC FR-PVC jacket

Size
Stranding
CAP (pF/FT)

22 AWG
7
65

Shield

Drain Wire

Low Smoke Aluminum Mylar
24 AWG Tinned Copper

Insulation

Material
Thickness
Colors

PVC
0.009" (0.23mm)
Black, Red, White, Green, Brown, Blue

Jacket

Material
Thickness
Nominal Outer Diameter
Color

FR-PVC
0.015" (0.38mm)
0.188" (4.78mm)
White

Ripcord

Material

High Strength Polyester

Electrical Performance

Rated Temperature
Voltage Rating

-25C° to 75C°
300 Volt

Flame Rating
Approvals

NFPA 262
CMP(UL444) NEC 800
CL3P (UL13) NEC 72

Marking on Jacket

4010346 18AWG 4 COND. RISER UNSHIELDED STRANDED 75C CMP
c(ETL)us FT4 CL3P ROHS COMPLIANT MADE IN USA PO##### OPER###
CL## [####FT/ ####FT]

SEQUENTIAL FOOT MARKERS ON JACKET

Approximate shipping weight: 51LBS

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.