

ACCESS CONTROL CABLE PLENUM 18AWG/4C + 22AWG/3P Shielded + 22AWG/2C + 22AWG/4C



SKU: 214-2328/P/OR

DESCRIPTION

18/4C + 22/3P SHIELDED + 22/2C + 22/4C, Access Control Cable, with an overall Plenum Rated Jacket, 500 ft Spool

FEATURES

- **4 Component Access Control Cable**
- **Contains: 18/4 CONDUCTORS + 22/3 PAIRS SHIELDED + 22/2 CONDUCTORS + 22/4 CONDUCTORS**
- **Overall Plenum Rated Jacket**
- **Applications Include: Power Lock, Card Reader, Door Contact and Rex/Spare**
- **UL Listed, RoHS Compliant**
- **500ft Spool**

Component 1: 18AWG/4C

Conductor:	18 AWG Bare Copper
Stranding:	7 Strand
Insulation Material:	Low Smoke Flame Retardant PVC
Insulation Color:	Black, Red, Green, White
Number of Conductors or Pairs:	4 Conductor
Shield:	N/A
Drain:	N/A
Jacket Material:	Low Smoke Flame Retardant PVC
Jacket Color:	Gray
Overall Jacket Diameter:	0.175 in. (4.445 mm.) Nominal
Jacket Print:	POWER LOCK CMP 4/18AWG C(ETL)US

Component 2: 22AWG/6C


Conductor:	22 AWG Bare Copper
Stranding:	7 Strand
Insulation Material:	Low Smoke Flame Retardant PVC
Number of Conductors or Pairs:	6 Conductor (3 Pairs)
Shield:	Aluminum/Polyester Tape (100% Coverage)
Drain:	Stranded Tin Copper
Jacket Material:	Low Smoke Flame Retardant PVC
Jacket Color:	Orange
Overall Jacket Diameter:	0.200 in. (5.080 mm.) Nominal
Insulation Color:	Black/Red, Green/ White, Orange/Brown
Surface Print:	CARD READER CMP 3P/22AWG C(ETL)US

Component 3: 22AWG/2C

Conductor:	22 AWG Bare Copper
Stranding:	7 Strand
Insulation Material:	Low Smoke Flame Retardant PVC
Insulation Color:	Black, Red
Number of Conductors or Pairs:	2 Conductor
Shield:	N/A
Drain:	N/A
Jacket Material:	Low Smoke Flame Retardant PVC
Jacket Color:	White
Overall Jacket Diameter:	0.122 in. (3.098 mm.) Nominal
Insulation Color:	Black, Red
Surface Print:	DOOR CONTACT CMP 2/22AWG C(ETL)US

Component 4: 22AWG/4C

Conductor:	22 AWG Bare Copper
Stranding:	7 Strand
Insulation Material:	Low Smoke Flame Retardant PVC
Insulation Color:	Black, Red, Green, White
Number of Conductors or Pairs:	4 Conductor
Shield:	N/A
Drain:	N/A
Jacket Material:	Low Smoke Flame Retardant PVC
Jacket Color:	Blue
Overall Jacket Diameter:	0.140 in. (3.556 mm.) Nominal
Surface Print:	REX/SPARE CMP 4/22AWG C(ETL)US

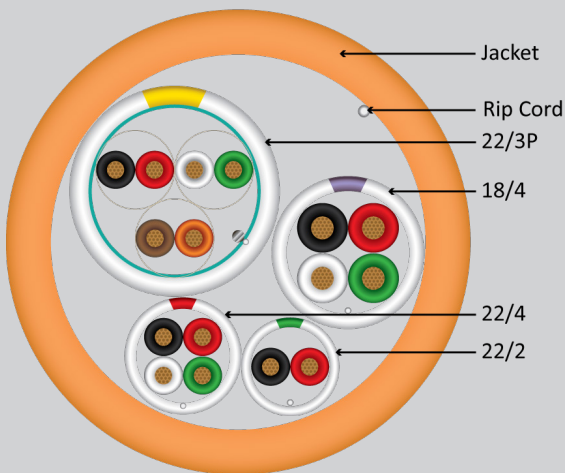

Continued on next page...



VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York

www.verticalcable.com

Rev. 08/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.

ACCESS CONTROL CABLE PLENUM 18AWG/4C + 22AWG/3P Shielded + 22AWG/2C + 22AWG/4C

Continued from previous page...

OVERALL CABLE ASSEMBLY

Jacket Material:	Low Smoke Flame Retardant PVC
Jacket Color:	Orange
Overall Jacket Diameter:	0.410 in. (10.414 mm.) Nominal
Surface Print:	3147706 ACCESS CONTROL CABLE CMP 4/18AWG 12/22AWG C(ETL)US FT6 MADE IN USA+ Sequential Footage Marking

NEC Article 800, UL Subject 444, Type CMP, C(ETL)US, RoHS Compliant

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 08/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.