

16AWG 2 CONDUCTOR STRANDED (65 STRAND) PLENUM RATED




DESCRIPTION

16AWG, 2 Conductor, Stranded Bare Copper
(65 Strand), PVC Jacket
Pull Box, 1000FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (Plenum Rated)

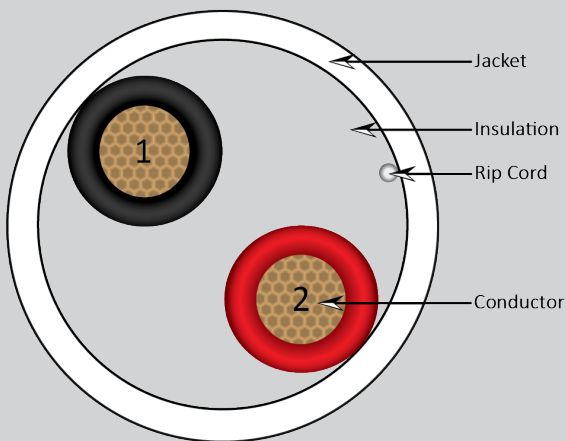

SKU: 309-3036/P/WH

Conductor	2 Core (Stranded)
Material	Annealed High-Strand Oxygen Free Bunched Bare Copper
Size	16 AWG
Stranding	65x34
Insulation	
Material	PVC
Thickness	0.0095 in.
Colors	Black, Red
Jacket	
Material	PVC
Thickness	0.020 in.
Nominal Outer Diameter	0.200 in.
Color	White
Ripcord	
Material	High Strength Polyester
Electrical Performance	
Rated Temperature	-20°C to 75°C
Voltage Rating	300 Volt RMS
DC Resistance	4.18Ω/1000 FT
Flame Rating	NFPA 262
Approvals	UL Type CMP, CL3P UL Subject 13, 444 CSA Type FT4 NEC Article 725, 800

Marking on Jacket

4010346 16AWG 2 COND. STRANDED OXYGEN FREE 75C CMP c(ETL)us
FT4 CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.