

# 14AWG 2 CONDUCTOR STRANDED (41 STRAND) PLENUM RATED (AUDIO ONLY)




## DESCRIPTION

14AWG, 2 Conductor, Stranded Bare Copper (41 Strand), Plenum Rated PVC Jacket  
Pull Box 500 FT, Made in USA

## APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3P, CMP (AUDIO ONLY)

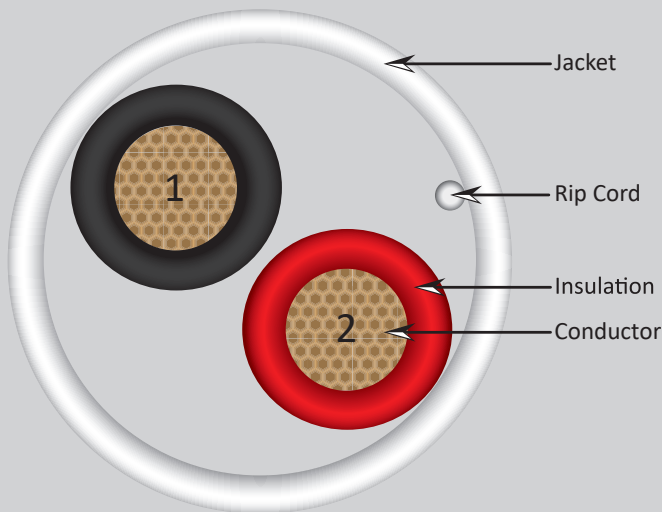

## SKU: 309-2095/P/5WH

**Conductor**  
Material: 2 Core (Stranded)  
Annealed High-Strand Oxygen Free  
Bunched Bare Copper  
Size: 14AWG  
Stranding: 41x30

**Insulation**  
Material: PVC  
Thickness: .013"  
Colors: Black, Red

**Jacket**  
Material: Plenum Rated PVC  
Thickness: 0.020"  
Nominal Outer Diameter: .235"  
Color: White

**Ripcord**  
Material: High Strength Polyester

**Electrical Performance**  
Rated Temperature: -20°C to 75°C  
Voltage Rating: 300 Volt RMS  
DC Resistance: 2.62Ω/1000 FT

Flame Rating: NFPA 262  
Approvals: UL Type CMP, CL3P  
UL Subject 13, 444  
CSA Type FT4  
NEC Article 725, 800

**Mechanical Characteristics**  
Unaged Tensile Strength (Mpa): ≥2000 PSI  
Aging Elongation (%): ≥100  
Aging Condition (°Cxhrs): 100x168  
After Tensile Strength (Mpa): ≥85% of unaged  
Aging Elongation (%): ≥50% of unaged  
Cold Bend (-20±2° Cx4hrs): No Crack

**Marking on Jacket**  
4010346 14AWG 2 COND. STRANDED OXYGEN FREE 75C CMP c(ETL)us  
FT4 CL3P ROHS COMPLIANT MADE IN USA XXXX FT

SEQUENTIAL FOOT MARKERS ON JACKET

Box weight 23 LB

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 05/2019

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.