

CAT5E 96 PORT PATCH PANEL 19" RACK MOUNTABLE



SKU: 041-375/96

Panel Housing

Material	SPCC
Thickness	0.059 in (1.5 mm)
Plated	Black
Dimension	EIA-310D (4U)

IDC Connector

IDC Housing	110 Type
IDC Terminal	PC, UL 94V-2
Compatibility	Phosphor Bronze, Tin Plated
	23-24 AWG
	Stranded & Solid Wire

Jack Connector

Contact Material	Phosphor Bronze with Nickel Plating
Contact Finish	50µ Gold Plated (Plug contact area)
Jack Housing	ABS, UL 94V-0

Performance



Wiring Color Codes	T568A & T568B
Insertion Force	20N max (IEC 60603-7-4)
Retention Force	17 lb (7.7 kg) between jack & plug
Operating Temp.	-10° C to 60° C
Life (mating cycles)	Jack 750 cycles min.

DESCRIPTION

CAT5E 96 Port Panel, 110 Type Termination. 19" Rack Mountable.

FEATURES

- High Impact Patch Panel
- Tough Black Painted Finish
- Number Labeled for Easy Identification
- T568A & T568B Wiring Color Codes
- 110 Type Termination (compatible with a standard 110 punch down tool)
- ISO/IEC 11801, ANSI/TIA/EIA 568C.2

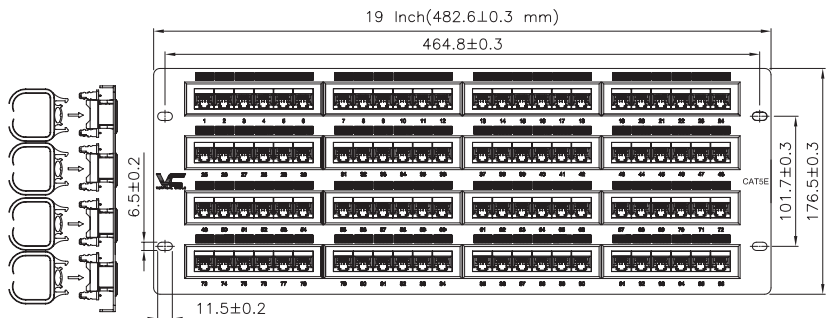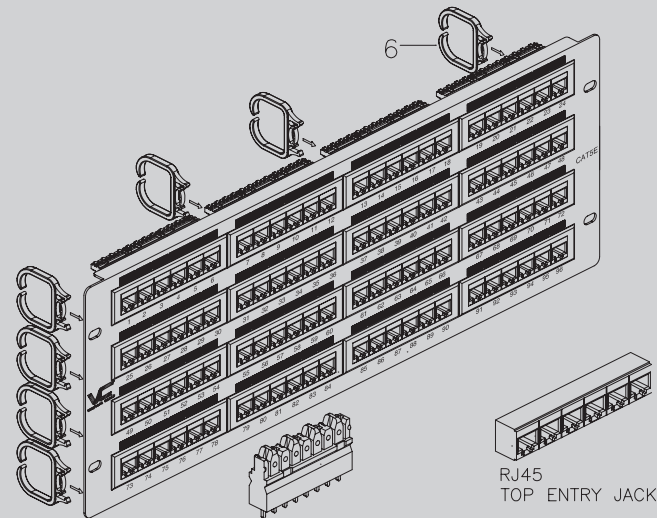

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2020
Subject to change without notice.