

18AWG 2 CONDUCTOR STRANDED (7 STRAND) RISER, UNSHIELDED




DESCRIPTION

18AWG, 2 Conductor, Stranded Bare Copper
(7 Strand), FR-PVC Jacket
Pull Box, 1000FT, Made in USA

APPLICATION

- Intercom Systems
- Security Systems
- Burglar Alarms
- Sound Systems
- Power Limited Control Circuits
- Indoor Applications
- CL3R, CMR (Riser Rated)

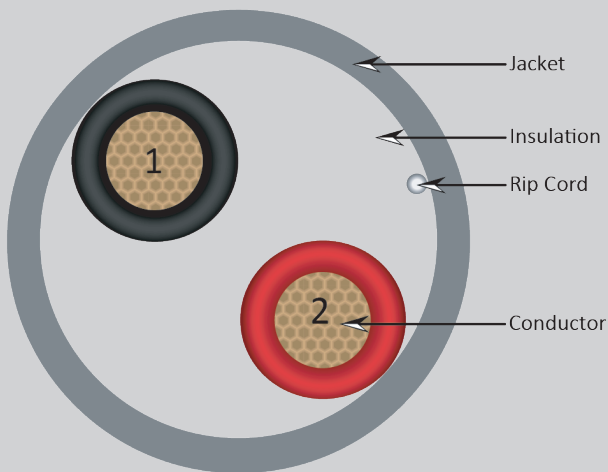

SKU: 309-3072/GY

Conductor	2 Core (Stranded)
Product Description	FR Low Smoke Polyvinyl Chloride (PVC) insulated bare copper conductors jacketed with an overall PVC FR-PVC jacket
Size	22 AWG
Stranding	7
CAP (pF/FT)	65
Insulation	
Material	PVC
Thickness	0.009" (0.23mm)
Colors	Black, Red, White, Green, Brown, Blue
Jacket	
Material	FR-PVC
Thickness	0.015" (0.38mm)
Nominal Outer Diameter	0.161" (4.09mm)
Color	White
Ripcord	
Material	High Strength Polyester
Electrical Performance	
Rated Temperature	-25C° to 75C°
Voltage Rating	300 Volt
Flame Rating	NFPA 262
Approvals	CMP(UL444) NEC 800 CL3P (UL13) NEC 72

Marking on Jacket

4010346 18AWG 2 COND. RISER UNSHIELDED STRANDED 75C CMR
c(ETL)us FT4 CL3R ROHS COMPLIANT MADE IN USA PO##### OPER###
CL## [#####FT/ ###FT]

SEQUENTIAL FOOT MARKERS ON JACKET

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 06/2020

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.