

CAT6 DIRECT BURIAL GEL FILLED (FLOODED CORE)




VERTICAL CABLE
Simply Connect.

DESCRIPTION

Category-6 CMXF, 8-Conductor, Direct Burial, Gel Filled, 23AWG Solid-Bare Copper.

FEATURES

- High-Performance Data Cable
- 600MHz Bandwidth for Data Applications, Fast Ethernet and 155Mbps TP-PMD/CDDI
- Category-6 Unshielded Twisted Pair
- Easily Identified Color-Striped Pairs
- 23AWG Solid Copper Conductors
- Exceeds TIA/EIA-568C.2, ISO/IEC 11801
- CAN/CSA -C22.2 No. 214
- ETL Listed, RoHS Compliant
- 1000ft Wooden Spool
- Weight - 36 lbs

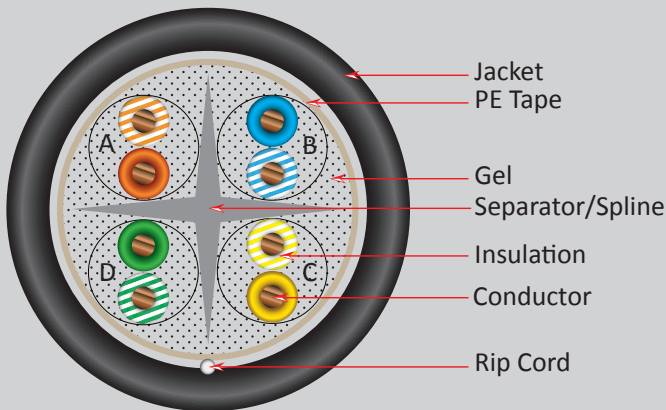

27pcs per pallet
(Packaging may vary)

SKU: 069-560/CMXF

Technical Data

Rated Temperature	-40~70°C
Rated Voltage	60V
Flammability Test	IEC-332-1
Conductor	Solid Bare Copper
Size	23 AWG
Insulation	PE
Insulation Diameter (±0.01mm)	1.01
Twisted Pair Diameter (±0.02mm)	2.02
Separator	LDPE
Assembly Diameter	5.00
Jacket	LLDPE (UV)
Outer Diameter (±0.30mm)	6.80
Rip Cord	Yes
Color	Black

Color of Pairs

Pair 1: Blue, White-Blue
Pair 2: Orange, White-Orange
Pair 3: Green, White-Green
Pair 4: Brown, White-Brown

Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before	Tensile Strength (Mpa) ≥13.8
Aging	Elongation (%) ≥100
Aging Condition (°Cxhrs)	100x168
After	Tensile Strength (Mpa) ≥85% of unaged
Aging	Elongation (%) ≥50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED UTP 4PR 23AWG
OUTDOOR DIRECT BURIAL (FLOODED) UV LLDPE CAT6
600MHz ANSI/TIA-568.2-D RoHS V1379P12459 XXXFT
(SEQUENTIAL FOOT MARKERS ON JACKET)

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.

CAT6 DIRECT BURIAL GEL FILLED (FLOODED CORE)

PERFORMANCE

Electrical Characteristics:

Characteristics Impedance	1~600 MHz 100±15 Ohms
Conductor Resistance	93.8 Ohm/Km/20°C Max
Mutual Capacitance	56 pF/M Max
Dielectric Strength	AC 1.5 KV/Min
Spark Test	2.5 KV
DC Resistance Unbalance	5% Max
Delay Skew	1~600 MHz 25nS/100m Max

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next Min (dB)
1	20.0	2.0	76.3
4	23.0	3.8	67.3
8	24.5	5.3	62.8
10	25.0	6.0	61.3
16	25.0	7.6	58.3
20	25.0	8.5	56.8
25	24.3	9.5	55.3
31.25	23.6	10.7	53.9
62.5	21.5	15.4	49.4
100	20.1	19.8	46.3
155	18.8	25.1	43.5
200	18.0	29.0	41.8
250	17.3	32.8	40.3
300	16.8	36.4	39.2
400	15.9	43.0	37.3
500	15.5	47.2	35.4
600	14.4	50.3	32.8

Frequency (Mhz)	PSNext Min (dB)	ELFEXT Min(db/100m)	ACR Min(dB)
1	74.3	67.8	74.3
4	65.3	55.7	63.5
8	60.8	49.7	57.5
10	59.3	47.8	55.3
16	56.3	43.7	50.7
20	54.8	41.7	48.3
25	53.3	39.8	45.8
31.25	51.9	37.9	43.2
62.5	47.4	31.8	34.0
100	44.3	27.8	26.5
155	41.5	23.9	18.4
200	39.8	21.7	12.8
250	38.3	19.8	7.5
300	37.2	18.2	2.8
400	35.3	15.7	NA
500	33.6	13.4	NA
600	32.1	12.6	NA

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.