


DIN-Rail to Equipment-Rack Adapter Bracket

251-ERA01-B2I DIN-Rail to Equipment Rack Adapter Bracket, Foldable, 2-RMU, 8-in Deep

CHARACTERISTICS

- Form-factor: 19-in rack/cabinet mounting standard (EIA-ECA-310-E).
- Capacity: up to 22 DU (385 mm (15.2 in)).
- Materials: 1.5-mm (16-GA) CRS;
black powder coating.
- Equipment mounting: 35-mm DIN rail;
11 depth positions;
25-mm (1-in) steps;
+50 mm (2 in) to -200 mm (8 in) (zero plane – flush with front flange).
- Cable management: detachable cable management bars, front and rear, two levels;
detachable plastic cable management rings.
- Bonding/grounding: two grounding conductor terminals.
- DIN rail: 35 mm;
galvanized steel;
400-mm (16-in) wide (22 DU).
- Compliance: IEC/EN 60715;
Directive 2011/65/EU Am. 2015/863/EU (RoHS2).
- Dimensions: width: 482.6 mm (19 in) flange-to-flange;
442 mm (17.4 in) frame;
height: 88 mm (3.5 in) [2 RMU];
depth: 300 mm (12 in).
- Dimensions, packed: 450 mm × 90 mm × 100 mm;
(17.7 in × 3.5 in × 4 in).
- Weight: 1.5 kg (3.3 lb).

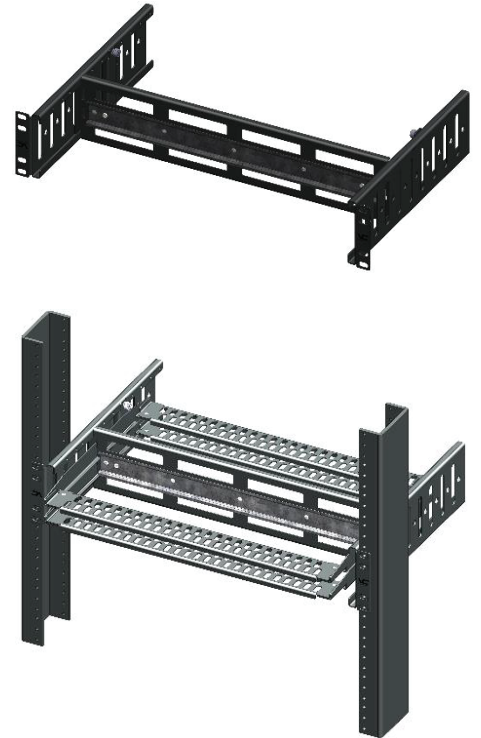

ACCESSORIES

- 251-CMB01-2A4 DIN-Rail to Equipment Rack Adapter Bracket, Cable Management Bar, General Purpose, 4-in Deep
- 251-CMB01-2A6 DIN-Rail to Equipment Rack Adapter Bracket, Cable Management Bar, General Purpose, 6-in Deep
- 251-CMB01-2A8 DIN-Rail to Equipment Rack Adapter Bracket, Cable Management Bar, General Purpose, 8-in Deep

CHARACTERISTICS

- Materials: 1.5-mm (16-GA) CRS;
black powder coating.
- Width: 410 mm (16.2 in).
- Height: 45 mm (1.75 in).
- Depth: 251-CMB01-2A4: 100 mm (4 in) panel-to-support;
150 mm (6 in) full;
251-CMB01-2A6: 160 mm (6 in) panel-to-support;
200 mm (8 in) full;
251-CMB01-2A8: 200 mm (8 in) panel-to-support;
250 mm (10 in) full.
- Dimensions, packed: 445 mm × 45 mm × 25 mm;
(17.5 in × 1.75 in × 1 in).
- Weight: 1.5 kg (3.3 lb).

Folded



Unfolded

