




## EZ-Xcess

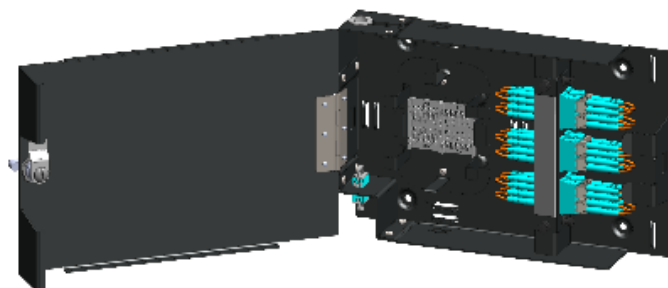

### EZX Series – Optical Fiber Wall-Mount Enclosures, LGX, Blank Door

|           | 1-Position    | 2-Position    | 4-Position    |
|-----------|---------------|---------------|---------------|
| Cam Latch | 268-EZX01-1A1 | 268-EZX01-1B1 | 268-EZX01-1D1 |
| Cam Lock  | 268-EZX01-1A2 | 268-EZX01-1B2 | 268-EZX01-1D2 |

| Capacity:  | Adapter plates | Fibers   | Splice trays | Splice holders |
|------------|----------------|----------|--------------|----------------|
| 1-position | 1              | up to 12 | —            | 1 or 2         |
| 2-position | 2              | up to 24 | 1 or 2       | —              |
| 4-position | 4              | up to 48 | 1 or 2       | —              |

### CHARACTERISTICS

|                                |                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------|
| Adapter plate format:          | LGX.                                                                                                           |
| Access:                        | single door;                                                                                                   |
| cam latch or cam lock options. |                                                                                                                |
| Mounting:                      | surface/wall;<br>left- or right-hand independent.                                                              |
| Cable management:              | cable entry port adapters;<br>cable anchor points (bridge lances);<br>set of cable ties and Velcro® tie wraps. |
| Fiber management:              | FM spools (default);<br>FM stage (optional).                                                                   |
| Labeling:                      | removable label holder, plain paper inserts.                                                                   |
| Materials:                     | 1.5-mm (15-GA) aluminum alloy;<br>black powder coating.                                                        |
| Environmental:                 | operating temperature: -20 °C–+70 °C (-4 °F–+158 °F);<br>operating humidity: ≤95 % RH non-condensing.          |

| Dimensions: | 1-position     | 2-position     | 4-position     |
|-------------|----------------|----------------|----------------|
| Width:      | 280 mm (11 in) | 300 mm (12 in) | 300 mm (12 in) |
| Height:     | 180 mm (7 in)  | 280 mm (11 in) | 280 mm (11 in) |
| Depth:*     | 50 mm (2 in)   | 50 mm (2 in)   | 90 mm (3.5 in) |

\* Without protruding parts of locks and latches.



## EZ-Xcess



# CROSS-CONNECT ► Surface- and Wall-Mount Enclosures

## Accessories

### Cable entry adapters

| "L" Shapes                                                                        |                                                                                                                                               | "M" Shapes                                                                         |                                                                                                                                               |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  |                                                                                                                                               |  |                                                                                                                                               |
| 268-ACC01-1A0                                                                     | bracket material: aluminum alloy.                                                                                                             | 268-ACC01-2A0                                                                      | bracket material: aluminum alloy.                                                                                                             |
| 268-ACC01-1B1                                                                     | cable diameter: ≤20 mm (0.8 in);<br>grommet material: TPE, UL 94-V2;<br>bracket material: aluminum alloy.                                     | 268-ACC01-2B1                                                                      | cable diameter: ≤12 mm (0.5 in);<br>grommet material: TPE, UL 94-V2;<br>bracket material: aluminum alloy.                                     |
| 268-ACC01-1C1                                                                     | cable diameter: ≤12 mm (0.5 in);<br>grommet material: TPE, UL 94-V2;<br>bracket material: aluminum alloy.                                     | 268-ACC01-2C1                                                                      | cable diameter: ≤8 mm (0.3 in);<br>grommet material: TPE, UL 94-V2;<br>bracket material: aluminum alloy.                                      |
| 268-ACC01-1D1                                                                     | cable diameter: ≤8 mm (0.3 in);<br>grommet material: TPE, UL 94-V2;<br>bracket material: aluminum alloy.                                      | 268-ACC01-2D1                                                                      | connector type: 1x MPO adapter, Type A, black, flanged;<br>mounting: lateral;<br>bracket material: aluminum alloy.                            |
| 268-ACC01-2A0                                                                     | gland form-factor: M12/PG7;<br>cable diameter: ≤6.5 mm (0.25 in);<br>gland material: polyamide/neoprene;<br>bracket material: aluminum alloy. | 268-ACC01-2E1                                                                      | connector type: 1x MPO adapter, Type A, black, flanged;<br>mounting: transversal;<br>bracket material: aluminum alloy.                        |
|                                                                                   |                                                                                                                                               | 268-ACC01-2F2                                                                      | connector type: 2x MPO adapter, Type A, black, flanged;<br>mounting: lateral;<br>bracket material: aluminum alloy.                            |
|                                                                                   |                                                                                                                                               | 268-ACC01-2G2                                                                      | connector type: 2x MPO adapter, Type A, black, flanged;<br>mounting: transversal;<br>bracket material: aluminum alloy.                        |
|                                                                                   |                                                                                                                                               | 268-ACC01-2H1                                                                      | gland form-factor: M12/PG7;<br>cable diameter: ≤6.5 mm (0.25 in);<br>gland material: polyamide/neoprene;<br>bracket material: aluminum alloy. |

### Fiber-Management/Splicing Stages

268-ACC03-11-xy Accessory FM/Splicing Stage, EZX/EZV-Series 1-Position, 1 Splice Holder

268-ACC03-12-xy Accessory FM/Splicing Stage, EZX/EZV-Series 1-Position, 2 Splice Holders

Substitute "x" in PN with:

"O": no sleeves;

"A": 2 sleeves;

"B": 4 sleeves;

"C": 6 sleeves;

"D": 8 sleeves;


"E": 12 sleeves;

"F": 24 sleeves (268-ACC03-12 only).

Substitute "y" in PN with:

"O": no sleeves;

"A": 40-mm sleeves.

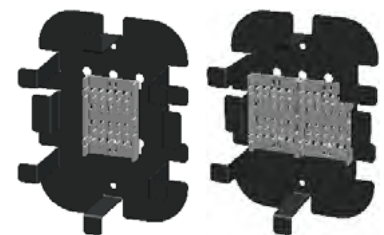

268-ACC03-11

268-ACC03-12

Splice holder capacity: twelve splice sleeves, stacked in two rows in six positions.

Each splice holder supplied with twelve 2.5 mm × 40 mm sleeves (265-SLV01-3A).

268-ACC03-xy Accessory FM/Splicing Stage, EZX/EZV-Series 2- & 4-Position, 1 Splice Tray

268-ACC03-xy Accessory FM/Splicing Stage, EZX/EZV-Series 2- & 4-Position, 2 Splice Trays

Substitute "x" in PN with:

"O": no sleeves;

"A": 2 sleeves;

"B": 4 sleeves;

"C": 6 sleeves;

"D": 8 sleeves;


"E": 12 sleeves;

"F": 24 sleeves.

Substitute "y" in PN with:

"O": no sleeves;

"A": 40-mm sleeves.

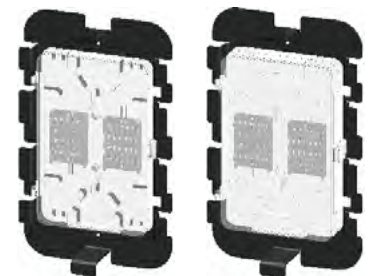

268-ACC03-21

268-ACC03-22

Splice tray capacity: two six-position splice holders.

Splice holder capacity: twelve splice sleeves, stacked in two rows in six positions.

Each splice holder supplied with twelve 2.5 mm × 40 mm sleeves (265-SLV01-3A).

|                        |     |
|------------------------|-----|
| Splice Sleeves         | P86 |
| Splice Trays/Cassettes | P84 |