

CAT6A CMP F/UTP PLENUM-RATED **SHIELDED**

SKU: 165-508/A/PS/WH




DESCRIPTION

CAT6A, 23 AWG, F/UTP (SHIELDED)
Solid Bare Copper, Plenum-Rated
1000 ft

FEATURES

- 23 AWG Bare Copper Conductors
- Overall Foil-Shielded Twisted-Pair (F/UTP) Construction
- Plenum Fire Safety Rating (CMP)
- Easy-to-See Vivid-Color Conductor Insulation & Jacket
- Exceeds ANSI/TIA-568-C.2 Transmission Performance Specifications
- Supports High-Speed Data Applications including Ethernet 10 Gigabit, 100 BASE TX, 100BaseVG AnyLan, 155ATM, 622ATM, NTSC/PAL, Component or Composite Video, AES/EBU Digital Audio, AES51, RS-422
- ETL-Listed, RoHS-Compliant
- Packaging: 1000 ft Wooden Spool - 15 in x 11.5 in, 48.4 lb

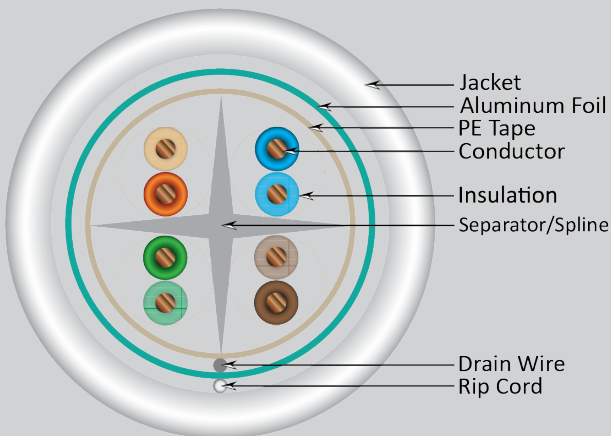

Technical Data

Product Standard Certification CMP

Conductor

Size Solid Tinned Copper
23 AWG
0.023 in. (0.585 mm ±0.006)

Insulation

Outer Diameter SAMP® FEP
0.044 in. (1.12 mm ±0.5)

Construction

Tape PE Tape (20/0.025 mm)
Drain Wire Solid Tin Copper
Shield (100% coverage with 25% overlapping) Aluminum/Poly Tape
Divider (Pair Separator) Yes, SAMP® FEP CROSSWEB
Ripcord Yes, Kevlar

Jacket

Outer Diameter Plenum PVC
Nom. Thickness 0.268 in. ±0.012 (6.8 mm ±0.3)
0.0197 in. (0.50 mm)

Color of Pairs

Pair 1 Brown, White-Brown
Pair 2 Blue, White-Blue
Pair 3 Orange, White-Orange
Pair 4 Green, White-Green

Mechanical Characteristics

Rated Temperature (°C) -20°C to 80°C
Voltage Rating 30 V
Capacitance 5.6nF/100m Nominal
Velocity of Propagation (VPN) ≥65 %
Max. Conductor D.C.R. 9.38Ω/100m Nominal
Max. D.C.R. Unbalance ≤5%

Characteristic Impedance

1 MHz - 100 MHz 100 ± 15%
101 MHz - 250 MHz 100 ± 22%
251 MHz - 550 MHz 100 ± 25%

Ratings

NEC Article 800, UL 444 Type CMP Rating FT6, ETL verified to ANSI/TIA-568-C.2, C(ETL)US, RoHS Compliant.

Marking on Jacket

4PR 23AWG SOLID CAT6A 550MHZ F/UTP CMPFT6 75C 5011596 (ETL) C(ETL) ETL VERIFIED TO ANSI/TIA-568-C.2 02/06/2022 ROHS COMPLIANT XXXXFT

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 09/2022

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.

CAT6A CMP F/UTP

PLENUM-RATED SHIELDED

PERFORMANCE

Frequency (MHz)	Attenuation (dB/100m)	NEXT (dB)	ACRF (dB/)	PS.NEXT (dB)	PS.ACRF (dB)	RL (dB)	Delay (ns/100m)	Skew (ns/100m)
1	1.9	65.0	64.2	62.0	61.2	19.1	521	44
4	3.5	64.1	52.1	61.8	49.1	21.0	504	
8	5.0	59.4	46.1	57.0	43.1	21.0	500	
10	5.5	57.8	44.2	55.5	41.2	21.0	498	
16	7.0	54.6	40.1	52.2	37.1	20.0	496	
20	7.8	53.1	38.2	50.7	35.2	19.5	495	
25	8.8	51.5	36.2	49.1	33.2	19.0	495	
31.25	9.8	50.0	34.3	47.5	31.3	18.5	494	
62.5	14.0	45.1	28.3	42.7	25.3	16.0	492	
100	18.0	41.8	24.2	39.3	21.2	14.0	491	
200	26.1	36.9	18.2	34.3	15.2	11.0	490	
250	29.5	35.3	16.2	32.7	13.2	10.0	490	
300	32.7	34.0	14.6	31.4	11.6	9.2	490	
400	38.4	32.0	12.1	29.3	9.1	8.0	490	
500	43.8	30.4	10.2	27.6	7.2	8.0	490	
550	46.3	29.7	9.4	26.9	6.4	8.0	489	

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 09/2022

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.