

CROSS-CONNECT






Surface- and Wall-Mount Enclosures Adapter Plate Surface-Mount Box

268-SMB01-1A1

Optical Fiber Surface-Mount Box, Standard-Series, LGX, One-Position

CHARACTERISTICS

- Capacity: one LGX adapter plate; up to 24 optical fibers; up to two 12-fiber splice holders.
- Materials: 1.5-mm (15-GA) aluminum alloy; black powder coating.
- Access: single door, panel fasteners ("push-pins"/"plunger locks").
- Mounting: surface/wall.
- Cable management: two cable entry openings; two mounting positions for MPO adapters; cable anchor points; set of cable ties.
- Fiber management: anchor points, rings.
- Environmental: operating temperature: $-20\text{ }^{\circ}\text{C}$ – $+70\text{ }^{\circ}\text{C}$ ($-4\text{ }^{\circ}\text{F}$ – $+158\text{ }^{\circ}\text{F}$); operating humidity: $\leq 95\%$ RH non-condensing.
- Dimensions: W: 160 mm (6.3 in), H: 140 mm (1.6 in), D: 32 mm (1.3 in).

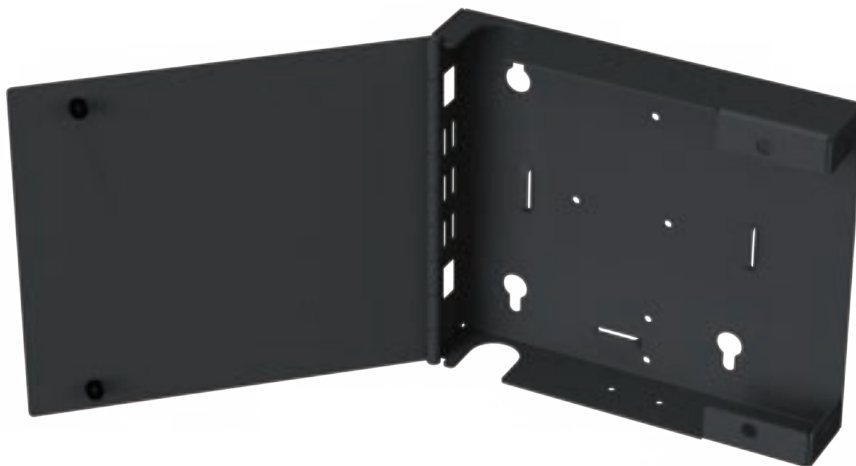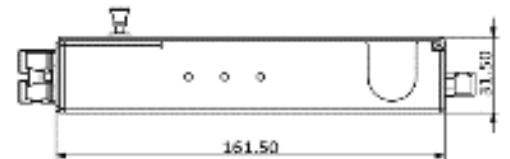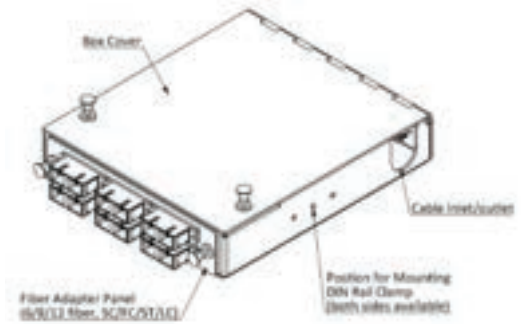

NOTE: Adapter plates and splice holders are sold separately

