

SECURITY CABLE 22 AWG 2 CONDUCTOR




DESCRIPTION

Security Cable, 22 AWG 2 CONDUCTOR
Solid Bare Copper, Riser-Rated
Unshielded

FEATURES

- CMR/CL2R
- 22 AWG 2 Conductor
- Solid Bare Copper Conductors
- ETL Listed, RoHS Compliant
- 1000 ft Box

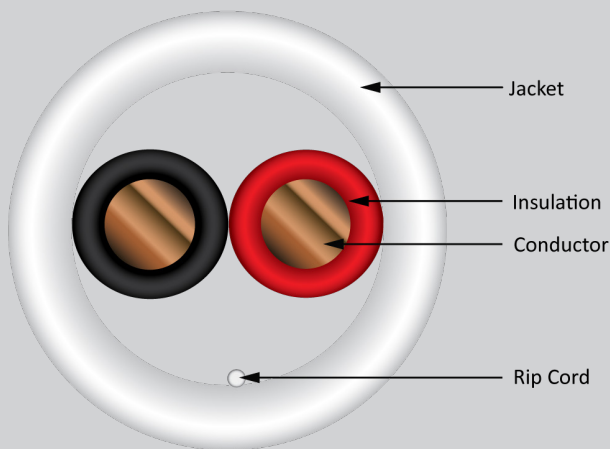

SKU: 293-2157

Conductor

Material 22 AWG Solid Bare Copper
Conductor Construction 0.02 in / 0.59 mm
Conductors 2 Conductor

Insulation

Material Polyvinyl Chloride (PVC)
Diameter 0.04 in. / 0.96 mm (±0.05)
Average Thickness 0.007 in. / 0.170 mm
Min. Thickness 0.006 in. / 0.150 mm
Colors Black, Red

Jacket

Material Polyvinyl Chloride (PVC)
Outer Diameter W: 0.11 in. / 2.85 mm (±0.1)
H: 0.09 in. / 2.20 mm (±0.1)
Average Thickness 0.016 in. / 0.40 mm
Min. Thickness 0.014 in. / 0.36 mm
Color Multiple colors (check availability)

Rip Cord

Nylon

Electrical & Physical Properties

Operating Temperature Rating 75°C
Operating Voltage Rating 30 V

Mechanical Properties

Test Object Jacket
Test Material Polyvinyl Chloride (PVC)
Before Tensile Strength (Mpa) >=13.8
Aging Elongation (%) >=100
Aging Condition (° C x hrs) 100x168
After Tensile Strength (Mpa) >=85% of unaged
Aging Elongation (%) >=50% of unaged
Cold Bend (-20±2° C x 4 hrs) No Crack

Ratings/Approvals

RoHS (2011/65/EU) Compliant

Jacket Print

VERTICAL 4001453 cETLus CMR/CL2R 75C 22AWG 2C SOLID ALARM/
STATION WIRE CABLE RoHS V1379PXXXX XXXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



verticalcable.com

Rev. 11/2022

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.