
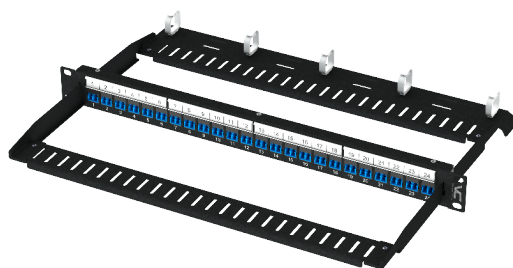


Rack-Mount Panels

Keystone Module Panels – Medium Density

266-PKM02-24000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Unloaded, w/o Label Holders
266-PKM02-24A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	White Bezels, w/o Label Holders
266-PKM02-24B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Black Bezels, w/o Label Holders
266-PKM03-24000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Unloaded, Label Holders
266-PKM03-24A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	White Bezels, Label Holders
266-PKM03-24B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position	Black Bezels, Label Holders

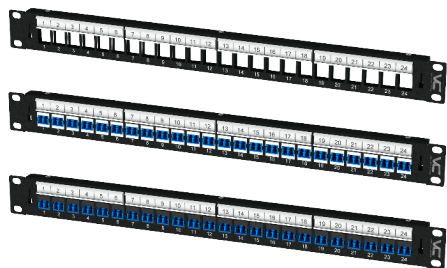

Panels with White Bezels

Panels with White Bezels					BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers		SC SX	24 modules 24 fibers					—
		266-PKM02-24A10 266-PKM03-24A10			266-PKM02-24A3Z 266-PKM03-24A3Z	266-PKM02-24A3Y 266-PKM03-24A3Y	266-PKM02-24A3A 266-PKM03-24A3A	266-PKM02-24A3C 266-PKM03-24A3C	
ST	24 modules 24 fibers		LC DX	24 modules 48 fibers					
		266-PKM02-24A20 266-PKM03-24A20			266-PKM02-24A4Z 266-PKM03-24A4Z	266-PKM02-24A4Y 266-PKM03-24A4Y	266-PKM02-24A4A 266-PKM03-24A4A	266-PKM02-24A4C 266-PKM03-24A4C	

Panels with Black Bezels

Panels with Black Bezels					BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	24 modules 24 fibers		SC SX	24 modules 24 fibers					—
		266-PKM02-24B10 266-PKM03-24B10			266-PKM02-24B3Z 266-PKM03-24B3Z	266-PKM02-24B3Y 266-PKM03-24B3Y	266-PKM02-24B3A 266-PKM03-24B3A	266-PKM02-24B3C 266-PKM03-24B3C	
ST	24 modules 24 fibers		LC DX	24 modules 48 fibers					
		266-PKM02-24B20 266-PKM03-24B20			266-PKM02-24B4Z 266-PKM03-24B4Z	266-PKM02-24B4Y 266-PKM03-24B4Y	266-PKM02-24B4A 266-PKM03-24B4A	266-PKM02-24B4C 266-PKM03-24B4C	266-PKM02-24B4D 266-PKM03-24B4D

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

266-PKM02-24000	266-PKM02-24A/B	266-PKM03-24000	266-PKM03-24A/B
1 × panel	1 × panel 24 × keystone modules	1 × panel	1 × panel 24 × keystone modules
1 × set of mounting screws 1 × shipping box	1 × set of mounting screws 1 × shipping box	4 × label holders 1 × set of mounting screws 1 × shipping box	4 × label holders 1 × set of mounting screws 1 × shipping box

Not included:

266-PKM02-D8000	266-PKM02-D8A/B	266-PKM03-D8000	266-PKM03-D8A/B
keystone modules (page 6) cable management bars (page 15) label holders	cable management bars (page 15) label holders	keystone modules (page 6) cable management bars (page 15)	cable management bars (page 15)

Rack-Mount Panels

Keystone Module Panels – Medium Density

CHARACTERISTICS

Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
Materials:	1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black).
Connectors:	see characteristics on page 6.
Adapter orientation:	key/latch up.
Cable management:	front and rear, removable, interchangeable (sold separately).
Labeling:	266-PKM02: factory-applied position number labeling; 266-PKM03: four plastic label holders, plain-paper label inserts.
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 15 mm (0.6 in).
Weight:	0.6 kg (1.3 lb) without keystone modules.