
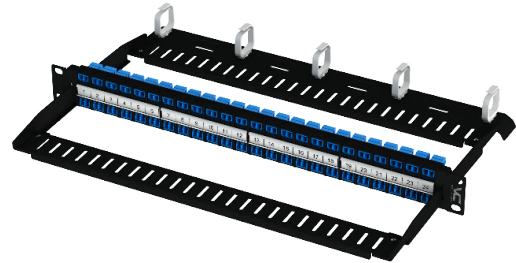


Rack-Mount Panels

Keystone Module Panels – High Density

266-PKM02-D8000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	Unloaded, w/o Label Holders
266-PKM02-D8A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	White Bezels, w/o Label Holders
266-PKM02-D8B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	Black Bezels, w/o Label Holders
266-PKM03-D8000	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	Unloaded, Label Holders
266-PKM03-D8A[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	White Bezels, Label Holders
266-PKM03-D8B[x][y]	Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 48-Position	Black Bezels, Label Holders

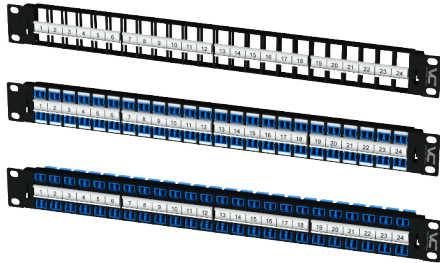

Panels with White Bezels

Panels with White Bezels					BLUE	GREEN	BEIGE	AQUA	H. VIOLET
FC	48 modules 48 fibers	 266-PKM02-D8A10 266-PKM03-D8A10	SC SX	48 modules 48 fibers	 266-PKM02-D8A3Z 266-PKM03-D8A3Z	 266-PKM02-D8A3Y 266-PKM03-D8A3Y	 266-PKM02-D8A3A 266-PKM03-D8A3A	 266-PKM02-D8A3C 266-PKM03-D8A3C	—
ST	48 modules 48 fibers	 266-PKM02-D8A20 266-PKM03-D8A20	LC DX	48 modules 96 fibers	 266-PKM02-D8A4Z 266-PKM03-D8A4Z	 266-PKM02-D8A4Y 266-PKM03-D8A4Y	 266-PKM02-D8A4A 266-PKM03-D8A4A	 266-PKM02-D8A4C 266-PKM03-D8A4C	 266-PKM02-D8A4D 266-PKM03-D8A4D

Panels with Black Bezels

Panels with Black Bezels				BLUE	GREEN	BEIGE	AQUA	H. VIOLET	
FC	48 modules 48 fibers	 266-PKM02-D8B10 266-PKM03-D8B10	SC SX	48 modules 48 fibers					—
					266-PKM02-D8B3Z 266-PKM03-D8B3Z	266-PKM02-D8B3Y 266-PKM03-D8B3Y	266-PKM02-D8B3A 266-PKM03-D8B3A	266-PKM02-D8B3C 266-PKM03-D8B3C	
ST	48 modules 48 fibers	 266-PKM02-D8B20 266-PKM03-D8B20	LC DX	48 modules 96 fibers					
					266-PKM02-D8B4Z 266-PKM03-D8B4Z	266-PKM02-D8B4Y 266-PKM03-D8B4Y	266-PKM02-D8B4A 266-PKM03-D8B4A	266-PKM02-D8B4C 266-PKM03-D8B4C	266-PKM02-D8B4D 266-PKM03-D8B4D

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

KITTING

As-delivered:

266-PKM02-D8000	266-PKM02-D8A/B	266-PKM03-D8000	266-PKM03-D8A/B
1 × panel	1 × panel 48 × keystone modules	1 × panel	1 × panel 48 × keystone modules
1 × set of mounting screws 1 × shipping box	1 × set of mounting screws 1 × shipping box	4 × label holders 1 × set of mounting screws 1 × shipping box	4 × label holders 1 × set of mounting screws 1 × shipping box

Not included:

266-PKM02-D8000	266-PKM02-D8A/B	266-PKM03-D8000	266-PKM03-D8A/B
keystone modules (page 6) cable management bars (page 15) label holders	cable management bars (page 15) label holders	keystone modules (page 6) cable management bars (page 15)	cable management bars (page 15)

Rack-Mount Panels

Keystone Module Panels – High Density

CHARACTERISTICS

Form-factor:	19-in rack/cabinet mounting standard (EIA-ECA-310-E).
Capacity:	forty-eight keystone modules; up to 48 optical fibers (FC, ST, SC SX adapters); up to 96 optical fibers (LC DX adapters).
Materials:	1.5-mm (16-GA) CRS; black powder coating, RAL 9005 (jet black).
Connectors:	see characteristics on page 6.
Adapter orientation:	key/latch up.
Cable management:	front and rear, removable, interchangeable (sold separately).
Labeling:	266-PKM02: factory-applied position number labeling; 266-PKM03: four plastic label holders, plain-paper label inserts.
Rack mounting:	set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
Environmental:	operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing.
Dimensions:	W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 15 mm (0.6 in).
Weight:	0.6 kg (1.3 lb) without keystone modules.