

# 16AWG 4 CONDUCTOR PLENUM RATED




## DESCRIPTION

16/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. 500ft or 1000ft, Pull Box

## APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

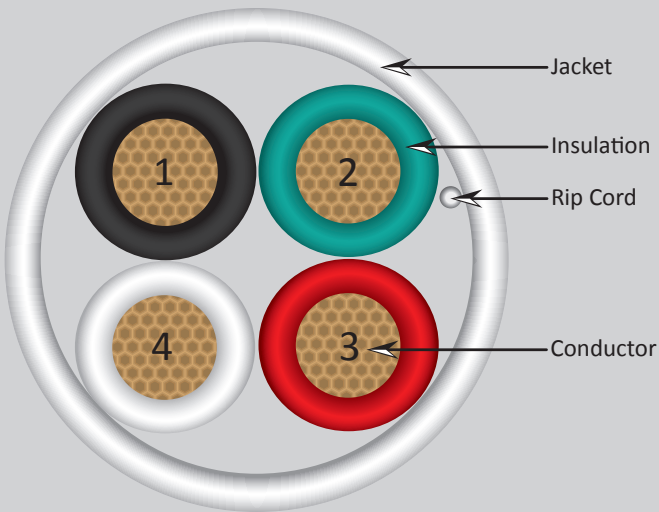

**SKU: 211-164/P/5WH**

**SKU: 211-164/P/WH**

### Conductor

Material	Bare Copper
Size	16AWG
Stranding	19 Strand
Diameter (mm)	19x0.287
Conductors	4 Conductor

### Insulation

Material	PL-PVC
Diameter ( $\pm 0.1$ mm)	2.0
Colors	Black, Red, White, Green

### Jacket

Material	PL-PVC
Thickness (mm)	0.46
Min. Thickness (mm)	0.36
Overall Diameter ( $\pm 0.15$ mm)	5.7
Color	White
Rip Cord	DuPont Kevlar

### Electrical & Physical Properties

Operating Temp	-20°C to +75°C
Voltage	300V RMS
DC Resistance per Conductor @ 20°C	4.19 $\Omega$ /1000ft
Maximum Pulling Tension	108lbs
Maximum Bend Radius (Installation)	2.1 inches

### Ratings/Approvals

NEC Article 800, Type CMP  
c(ETL)US or c(UL)us, RoHS Compliant

### Jacket Print

16AWG\*4C 75C E329281 CMP (UL) C(UL) MM/DD/YYYY RoHS  
COMPLIANT \*\*\*\*FT  
Sequential foot markings.

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 04/2015

Specs subject to change without notice.  
It is the sole responsibility of the user to have the most current specs.