

18AWG 6 CONDUCTOR PLENUM RATED (CMP)




SKU: 211-186ST/P/WH
211-186ST/P/5WH

DESCRIPTION

18/6 Stranded Bare Copper Conductors,
Unshielded with an overall jacket
CMP PLENUM RATED

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

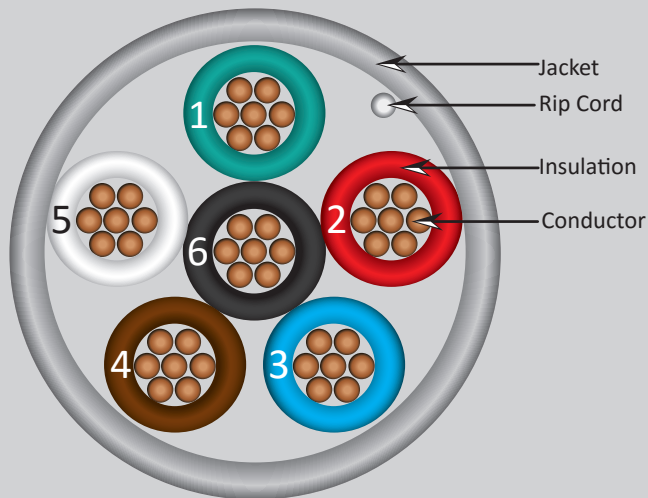

Available in 500ft & 1000ft
Check availability

Conductor

Material	Stranded Bare Copper
Size	18AWG
Stranding	7
Conductors	6 Conductor

Insulation

Material	Low Smoke Flame Retardant
Thickness	0.009 in (0.228mm) Nominal
Colors	Black, White, Red, Green

Jacket

Material	Low Smoke Flame Retardant
Thickness	0.015in (0.381mm) Nominal
Overall Diameter	0.210in (5.334mm) Nominal
Color	White

Electrical & Physical Properties

Voltage	300V RMS
DC Resistance per Conductor @ 20°C	6.92Ω/1000ft
Nominal Capacitance:	25.4pf/ft
Nominal Impedance:	73Ω
Nominal Velocity of Propagation:	55%

Ratings/Approvals

NEC Article 800, Type CMP FT6
c(ETL)US or c(UL)us, RoHS Compliant
UL Subject 444

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 9/2019

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.