

# ALARM-SECURITY CABLE

## 22 AWG 2 CONDUCTOR

### STRANDED CONDUCTORS SHIELDED



## 210-222ST/S SERIES



Part Number:	Description:
210-222ST/S/5GY	Security Cable, Stranded, Shielded, 22 AWG 2 C, Gray 500 ft.
210-222ST/S/5WH	Security Cable, Stranded, Shielded, 22 AWG 2 C, White 500 ft.
210-222ST/S/GY	Security Cable, Stranded, Shielded, 22 AWG 2 C, Gray 1000 ft.

### DESCRIPTION

22 AWG 2 Conductor Stranded Bare Copper, CM/CL2, Shielded with an overall jacket.

### APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



### CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes
PE Tape:	Yes
Drain Wire (TC):	Yes
Aluminum Foil:	Yes

### CONDUCTORS

Material:	Stranded Bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

### JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.13 in. (3.30 mm)
Marking:	VERTICAL 4001453 cETLUS CM/CL2 22AWG 2C STRANDED SHIELDED 75C RoHS V1379P13254

### MECHANICAL


Temperature rating:	75° C
---------------------	-------

### SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

### PACKED WEIGHT

210-222ST/S/5GY	7 lb (3.2 kg)
210-222ST/S/5WH	7 lb (3.2 kg)
210-222ST/S/GY	13 lb (5.9 kg)

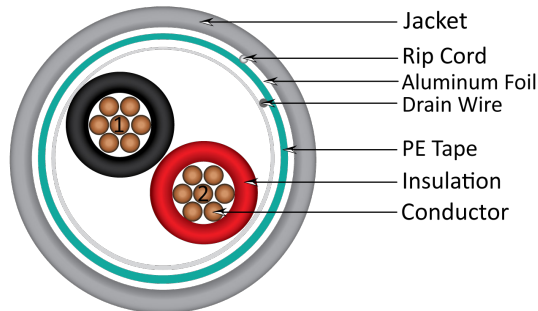

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2023  
Subject to change without notice.