

ALARM-SECURITY CABLE

22 AWG 4 CONDUCTOR
SOLID CONDUCTORS



210-224SO/5GY

Part Number:	Description:
210-224SO/5GY	Security Cable, Unshielded, Solid, 22 AWG 4 C, 500 ft, Gray
210-224SO/5WH	Security Cable, Unshielded, Solid, 22 AWG 4 C, 500 ft, White
210-224SO/GY	Security Cable, Unshielded, Solid, 22 AWG 4 C, 1000 ft, Gray
210-224SO/WH	Security Cable, Unshielded, Solid, 22 AWG 4 C, 1000 ft, White

DESCRIPTION

22 AWG 4 Conductor Solid Bare Copper, CM/CL2, Unshielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



CONSTRUCTION

Conductor count: 4
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Solid bare copper
Trade size: 22 AWG
Conductor O.D.: 0.02 in. (0.61 mm)
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.04 in. (0.96 mm)
Insulation color: Black, Red, White, Green

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.02 in. (0.45 mm)
O.D.: 0.12 in. (3.20 mm)
Marking: Vertical Cable E312655 UL C(UL) CMR/CL2R 75C 22AWG
4C SOLID ALARM/STATION WIRE CABLE (VID:C1) XXXXFT

MECHANICAL


Temperature rating: 75° C

SAFETY

NFPA 70 (NEC®) rating: CM/CL2
Voltage rating: 300 V RMS

PACKED WEIGHT

210-224SO/5GY 8 lb (3.6 kg)
210-224SO/5WH 8 lb (3.6 kg)
210-224SO/GY 14 lb (6.3 kg)
210-224SO/WH 14 lb (6.3 kg)

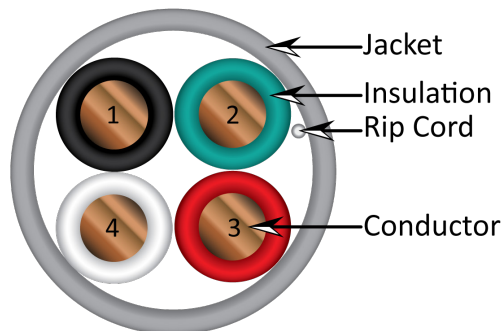

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2023

Subject to change without notice.