

# ALARM-SECURITY CABLE

22 AWG 4 CONDUCTOR  
STRANDED (UNSHIELDED)



## 210-224ST SERIES

Part Number:	Description:
210-224ST/WH	Alarm-Security Cable, Stranded, 22 AWG 4 C, 1000 ft, White
210-224ST/GY	Alarm-Security Cable, Stranded, 22 AWG 4 C, 1000 ft, Gray
210-224ST/5WH	Alarm-Security Cable, Stranded, 22 AWG 4 C, 500 ft, White
210-224ST/5GY	Alarm-Security Cable, Stranded, 22 AWG 4 C, 500 ft, Gray

### DESCRIPTION

22 AWG 4 Conductor Stranded Bare Copper, CM/CL2, Unshielded with an overall jacket.

### CONSTRUCTION

Conductor count:	4
Shape:	Round
Rip cord:	Yes

### CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (0.96 mm)
Insulation color:	Red, Black, White, Green

### JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.1 in. (3.40 mm)
Marking:	VERTICAL 4001453 cETLUS CM/CL2 22AWG 4C STRANDED 75C RoHS V1379P13404 XXXXFT

### MECHANICAL

Temperature rating:	75° C
---------------------	-------

### SAFETY



NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

### PACKED WEIGHT

210-224ST/WH	16.2 lb (7.3 kg)
210-224ST/GY	16 lb (7.2 kg)
210-224ST/5WH	8 lb (3.6 kg)
210-224ST/5GY	8 lb (3.6 kg)

### APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

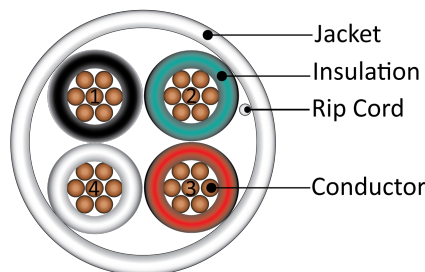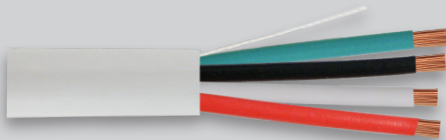

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2023  
Subject to change without notice.