



ALARM-SECURITY CABLE

22 AWG 6 CONDUCTOR STRANDED (UNSHIELDED)

210-226ST SERIES


| Part Number: | Description: |
|---------------|--|
| 210-226ST/5GY | Security Cable, Stranded, Unshielded, 22 AWG 6 C, 500 ft, Gray |
| 210-226ST/5WH | Security Cable, Stranded, Unshielded, 22 AWG 6 C, 500 ft, White |
| 210-226ST/GY | Security Cable, Stranded, Unshielded, 22 AWG 6 C, 1000 ft, Gray |
| 210-226ST/WH | Security Cable, Stranded, Unshielded, 22 AWG 6 C, 1000 ft, White |

DESCRIPTION

22 AWG 6 Conductor Stranded Bare Copper, CM/CL2, Unshielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

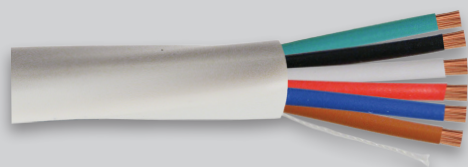

CONSTRUCTION

Conductor count: 6
Shape: Round
Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
Trade size: 22 AWG
Diameter: 7 Strand (7x0.24mm)
Insulation material: Polyvinyl Chloride (PVC)
Insulation O.D.: 0.04 in. (1.10 mm)
Insulation color: Red, Black, White, Green, Blue, Brown

JACKET

Material: Polyvinyl Chloride (PVC)
Thickness: 0.02 in. (0.45 mm)
O.D.: 0.17 in. (4.30 mm)
Marking: VERTICAL 4001453 cETLus CM/CL2 22AWG 6C
STRANDED 75C RoHS V1379P13043 XXXXFT

MECHANICAL


Temperature rating: 75° C

SAFETY

NFPA 70 (NEC®) rating: CM/CL2
Voltage rating: 300 V RMS

PACKED WEIGHT

| | |
|---------------|-----------------|
| 210-226ST/5GY | 12 lb (5.4 kg) |
| 210-226ST/5WH | 12 lb (5.4 kg) |
| 210-226ST/GY | 23 lb (10.4 kg) |
| 210-226ST/WH | 23 lb (10.4 kg) |

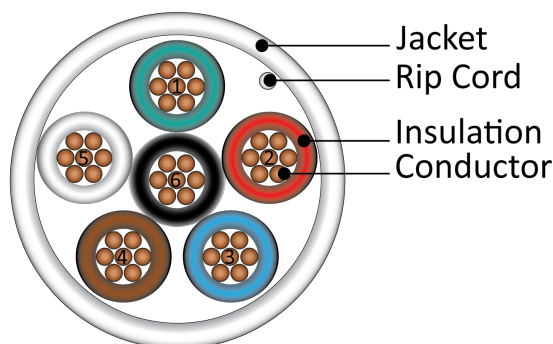

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2023

Subject to change without notice.