




DESCRIPTION

22 AWG 8 Conductor Stranded Bare Copper, CL3P (Plenum Rated) Unshielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

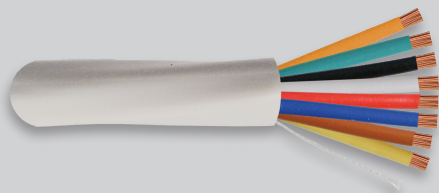

ALARM-SECURITY CABLE

22 AWG 8 CONDUCTOR

PLENUM RATED, STRANDED (UNSHIELDED)

210-228/P/WH

Part Number:	Description:
210-228/P/WH	Alarm-Security Cable, Plenum, Unshielded, Stranded, Bare Copper Conductors, 22 AWG 8 C, 1000 ft, White, Wood Spool

CONSTRUCTION

Conductor count:	8
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded Bare copper
Trade size:	22 AWG
Conductor O.D.:	0.02 in. (0.61 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (0.96 mm)
Insulation color:	Green, Red, Blue, Brown, White, Black, Yellow, Orange

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.17 in. (4.50 mm)
Marking:	22 AWG 8/C E57497 (BI) C(UL)US CMP/CL3P/FPLP 75C – CMP FT6 MADE IN USA ROHS-2 COMPLIANT – 10/03/17 13:18 07696

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

Flame Test:	NFPA 262(UL 910) / CSA FT6
Capacitance:	22 pF/Ft Nominal
Vel of prop:	55%
Impedance:	84 OHMS
Resistance:	17.5 OHMS D.C. PER 1000 Ft @ 68 DEG. F Max
NFPA 70 (NEC®) rating:	CMP/CL3P
Voltage rating:	300 V RMS

PACKED WEIGHT

210-228/P/WH	28 lb (12.7 kg)
--------------	-----------------

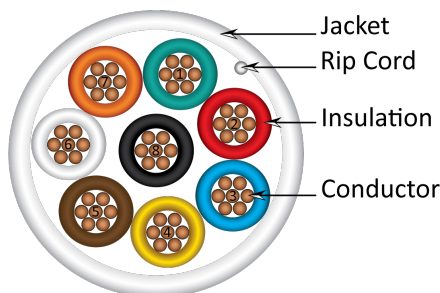

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2023
Subject to change without notice.