

# ALARM-SECURITY CABLE

22 AWG 8 CONDUCTOR  
STRANDED (SHIELDED)



## 210-228ST/S SERIES



Part Number:	Description:
210-228ST/S/5GY	Security Cable, Stranded, Shielded, 22 AWG 8 C, 500 ft, Gray
210-228ST/S/5WH	Security Cable, Stranded, Shielded, 22 AWG 8 C, 500 ft, White
210-228ST/S/GY	Security Cable, Stranded, Shielded, 22 AWG 8 C, 1000 ft, Gray
210-228ST/S/WH	Security Cable, Stranded, Shielded, 22 AWG 8 C, 1000 ft, White

### DESCRIPTION

22 AWG 8 Conductor Stranded Bare Copper, CM/CL2, Shielded with an overall jacket.

### APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

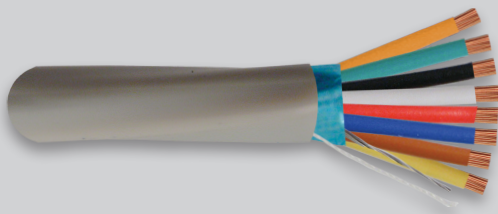

### CONSTRUCTION

Conductor count:	8
Shape:	Round
Rip cord:	Yes
PE Tape	Yes
Drain Wire (TC)	7/0.20
Aluminum Foil	Yes

### CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Diameter:	7 Strand (7x0.24mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black, Green, Blue, Brown, White, Orange, Yellow

### JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.50 mm)
O.D.:	0.20 in. (5.10 mm)
Marking:	VERTICAL 4001453 cETLus CM/CL2 22AWG 8C STRANDED SHIELDED 75C RoHS V1379P13404 XXXXFT

### MECHANICAL


Temperature rating:	75° C
---------------------	-------

### SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

### PACKED WEIGHT

210-228ST/S/5GY	15 lb (6.8 kg)
210-228ST/S/5WH	15 lb (6.8 kg)
210-228ST/S/GY	33 lb (15 kg)
210-228ST/S/WH	33 lb (15 kg)

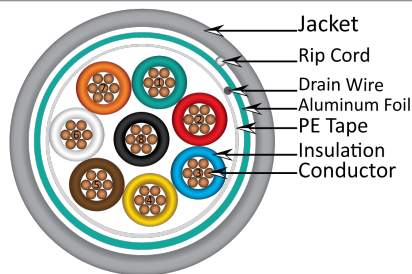

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 10/2023  
Subject to change without notice.