

ALARM-SECURITY CABLE

12 AWG 2 CONDUCTOR

STRANDED PLENUM RATED



VERTICAL CABLE

Simply Connect.

DESCRIPTION

12 AWG 2 Conductor Stranded Bare Copper, CL3P, Unshielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



211-122/P/5WH

Part Number:	Description:
211-122/P/5WH	Security Cable, Stranded, Plenum, 12 AWG 2 C, 500 ft, White

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	12 AWG
Stranding:	19 Strand
Strand Diameter:	0.02 in (0.47 mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.01 in. (0.38 mm)
O.D.:	0.20 in. (5.10 mm)
Marking:	12AWG 2C STRANDED c(ETL)us CMP 50424318 RoHS/FT6/CL3P 53214M0729101 10:23 500FT

MECHANICAL


Temperature rating:	75° C
DCR Conductor	5.41 Ohms/Km. @ 20°C

SAFETY

NFPA 70 (NEC®) rating:	CMP/CL3P
Voltage rating:	300 V RMS

PACKED WEIGHT

211-122/P/5WH	31 lb (14 kg)
---------------	---------------

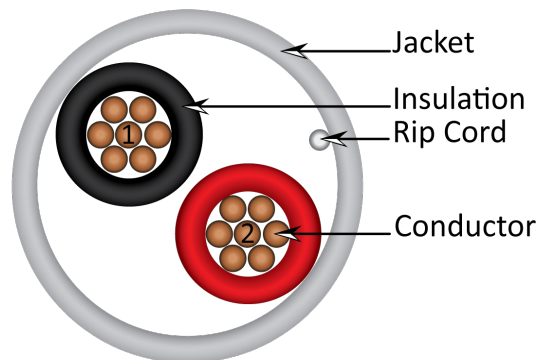

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2023

Subject to change without notice.