

AUDIO CABLE

12 AWG 2 CONDUCTOR

STRANDED CABLE



DESCRIPTION

12 AWG 2 Conductor Stranded Bare Copper, Unshielded with an overall jacket.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications



209-2324 SERIES

Part Number:	Description:
209-2324	Audio Cable, Stranded, Unshielded, 12 AWG 2 C, White 500 ft.
209-2324/BK	Audio Cable, Stranded, Unshielded, 12 AWG 2 C, Black 500 ft.

CONSTRUCTION

Conductor count: 2
 Shape: Round
 Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
 Trade size: 12 AWG
 Stranding: 65/0.25 mm
 Insulation material: Polyvinyl Chloride (PVC)
 Insulation O.D.: 0.10 in. (2.60 mm)
 Insulation color: Red, Black

JACKET

Material: Polyvinyl Chloride (PVC)
 Thickness: 0.03 in. (0.80 mm)
 O.D.: 0.32 in. (8.20 mm)
 Marking: VERTICAL 4002107 c(ETL)usAUDIO CABLE 12AWG 2 COND 65 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS XXXFT 103204M0208104

MECHANICAL


Temperature rating: 75° C
 Before Tensile Strength (Mpa): ≥13.8
 Aging Elongation (%): ≥100
 Aging Condition (°Cxhrs): 100x168
 After Tensile Strength (Mpa): ≥85% of unaged
 Aging Elongation (%): ≥50% of unaged
 Cold Bend (-20±2° Cx4hrs): No Crack

SAFETY

NFPA 70 (NEC®) rating: CMR/CL3
 Voltage rating: 300 V RMS

PACKED WEIGHT

209-2324: 35 lb (15.9 kg)
 209-2324/BK: 35.5 lb (16.1 kg)

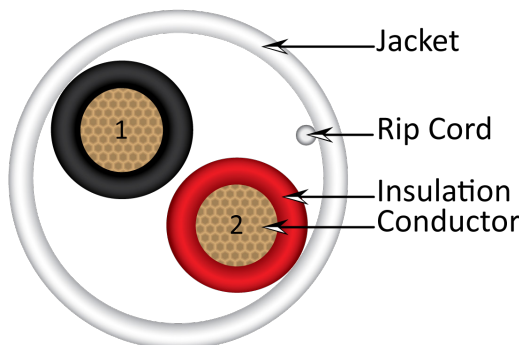

VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York



www.verticalcable.com

Rev. 11/2023
 Subject to change without notice.