

ALARM-SECURITY CABLE

22 AWG 4 CONDUCTOR

STRANDED CABLE




DESCRIPTION

22 AWG 4 Conductor Stranded Bare Copper, Unshielded with an overall jacket, Coil Pack, 500 FT.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

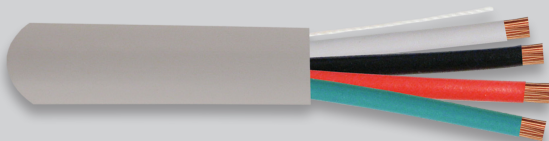

212-224ST SERIES

Part Number:	Description:
212-224ST/5GY	Security Cable, Stranded, Unshielded, 22 AWG 4 C, Gray 500 ft.
212-224ST/5WH	Security Cable, Stranded, Unshielded, 22 AWG 4 C, White 500 ft.

CONSTRUCTION

Conductor count: 4
 Shape: Round
 Rip cord: Yes

CONDUCTORS

Material: Stranded bare copper
 Trade size: 22 AWG
 Stranding: 7/0.24 mm
 Insulation material: Polyvinyl Chloride (PVC)
 Insulation O.D.: 0.04 in. (1.10 mm)
 Insulation color: Red, Black, Green, White

JACKET

Material: Polyvinyl Chloride (PVC)
 Thickness: 0.02 in. (0.45 mm)
 O.D.: 0.14 in. (3.60 mm)
 Marking: VERTICAL 4001453 cETLUS CM/CL2 22AWG 4C
 STRANDED 75C RoHS V1379P13404 XXXXFT

MECHANICAL


Temperature rating: 75° C

SAFETY

NFPA 70 (NEC®) rating: CM/CL2
 Voltage rating: 300 V RMS

PACKED WEIGHT

212-224ST/5GY: 7 lb (3.18 kg)
 212-224ST/5WH: 7 lb (3.18 kg)

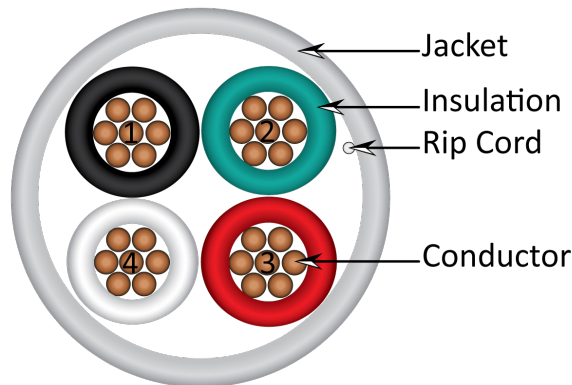

VERTICAL CABLE

951.696.7772 California
 800.749.2447 Florida
 845.391.8318 New York



www.verticalcable.com

Rev. 11/2023

Subject to change without notice.