

CAT6 PATCH CABLE UNSHIELDED (BARE COPPER)




DESCRIPTION

CAT6 Mold-Injection-Snagless Patch Cord, 24 AWG Stranded, PVC Jacket.

FEATURES

- Bare Copper Stranded Conductors
- Unshielded RJ45 Modular Plugs
- 8P8C Gold-Plated Pins
- T568B Wiring Color Code
- RoHS Compliant, UL

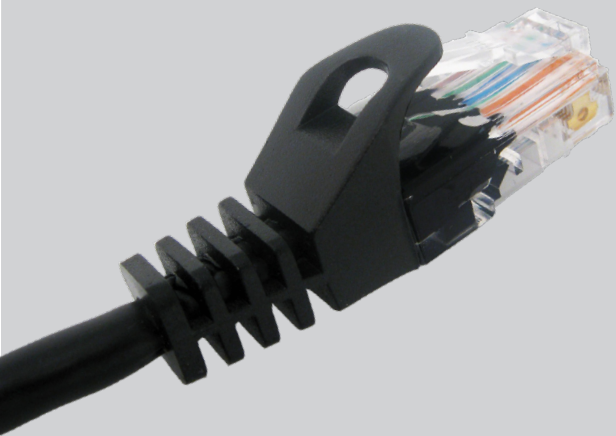

SKU: 094-SERIES

Conductor

Size 24 AWG Stranded
Material Bare Copper

Jacket

Material PVC, CM-Rated
Diameter 0.23 in (5.8±0.2 mm)

Operating Temperature -20°C to 60°C

Connectors

RJ45 8P/8C Gold Plated
RoHS Compliant Yes
Insulation Resistance Min. 5000 MΩ Km
Conductor Resistance Max. 9.38 Ω/100m

Approvals

UL cUL Listed, ETL / 3P Certified ANSI/TIA-568-C.2 Category 6 standards.

Available in Black, Blue, Green, Gray, Orange, Purple, Red, White, Yellow.

Check availability with the Account Manager.

Weights:	
0.5 ft - 0.025 lb	10 ft - 0.25 lb
1 ft - 0.05 lb	14 ft - 0.35 lb
2 ft - 0.066 lb	20 ft - 0.40 lb
3 ft - 0.10 lb	25 ft - 0.50 lb
4 ft - 0.13 lb	35 ft - 0.60 lb
5 ft - 0.15 lb	50 ft - 1.0 lb
6 ft - 0.20 lb	75 ft - 1.5 lb
7 ft - 0.23 lb	100 ft - 2.0 lb
	150 ft - 2.3 lb

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 07/2019

Subject to change without notice.