

RG6 STANDARD SHIELD

18 AWG COAXIAL CABLE

DIRECT BURIAL



DESCRIPTION

RG6 Standard Shield Direct Burial
18 AWG Solid CCS Conductor,
Aluminum Foil with 60% Braid.

APPLICATION

- Digital HDTV Applications
- Digital Satellite Installations
- CATV
- Suitable for Direct Burial Application



107-1234/DB/6S

Part Number:	Description:
107-1234/DB/6S	Coaxial Cable, Standard Shield, 18 AWG Solid CCS, Black 1000 ft.

CONSTRUCTION

Conductor count:	1
Shape:	Round
Gel Filling:	Yes
Braid:	60% Aluminum
Aluminum Foil:	Yes

CONDUCTORS

Material:	Copper Clad Steel
Trade size:	18 AWG
Insulation material:	Dielectric Foam PE
Insulation O.D.:	0.18 in. (4.60 mm)
Insulation color:	White

JACKET

Material:	Polyethylene (PE)
O.D.:	0.27 in. (6.90 mm)
Marking:	RG6 18AWG DIRECT BURIAL CABLE 60% 3.0GHZ CMX-CATV ROHS ETL VERIFIED V2094P13528 XXXXFT

MECHANICAL


Temperature rating:	75° C
Sparker Test:	3000VAC
Impedance:	75 Ohm
Capacitance:	54 pF/m
Velocity of Propagation:	85%
Return Loss:	23 dB Min (5-2300 MHz)
Bending Radius MINI.:	69 mm

SAFETY

NFPA 70 (NEC®) rating:	CMX/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

107-1234/DB/6S:	23 lb (10.4 kg)
-----------------	-----------------

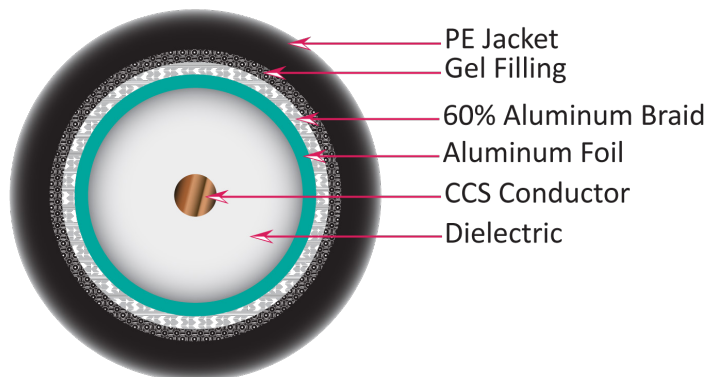

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 12/2023

Subject to change without notice.