



## DESCRIPTION

10 AWG 2 Conductor Stranded Bare Copper,  
Unshielded with an overall jacket.

## APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications



# AUDIO CABLE

## 10 AWG 2 CONDUCTOR STRANDED CABLE

### 209-2335/5WH

Part Number:	Description:
209-2335/5WH (Spool)	Audio Cable, Stranded, Unshielded, 10 AWG 2 C, White 500 ft.

#### CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes

#### CONDUCTORS

Material:	Stranded bare copper
Trade size:	10 AWG
Stranding:	105/0.25 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.16 in. (4.10 mm)
Insulation color:	Red, Black

#### JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.03 in. (0.65 mm)
O.D.:	0.37 in. (9.30 mm)
Marking:	VERTICAL 4002107 c(ETL)us AUDIO CABLE 10AWG 2 COND 105 STRANDED OXYGEN FREE CMR FT4 CL3R RoHS V2094P11760 XXXFT

#### MECHANICAL


Temperature rating:	75° C
Before Tensile Strength (Mpa):	≥13.8
Aging Elongation (%):	≥100
Aging Condition (°Cxhrs):	100x168
After Tensile Strength (Mpa):	≥85% of unaged
Aging Elongation (%):	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

#### SAFETY

NFPA 70 (NEC®) rating:	CMR/CL3
Voltage rating:	300 V RMS

#### PACKED WEIGHT

209-2335/5WH:	52 lb (23.6 kg)
---------------	-----------------

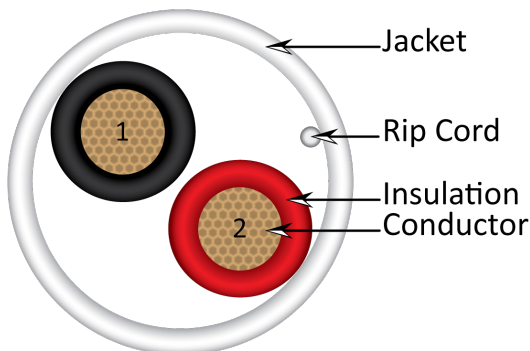

**VERTICAL CABLE**

951.696.7772 California  
800.749.2447 Florida  
845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 11/2023

Subject to change without notice.