

# CAT6A 24 PORT PATCH PANEL

## 19-in RACK MOUNTABLE



### DESCRIPTION

CAT6A 24 Port Panel, 110 Type Termination.  
19-in Rack Mountable.

### FEATURES

- High Impact Unshielded Patch Panel
- Tough Black Painted Finish
- Number Labeled for Easy Identification
- T568A & T568B Wiring Color Codes
- 110 Type Termination
- ISO/IEC 11801, ANSI/TIA 568.2-D



### SKU: 042-381-U6A/24

#### Panel Housing

Material SPCC  
 Thickness 0.06 in. (1.5 mm)  
 Plated Black  
 Dimension EIA-310D (1U)

#### IDC Connector

110 Type  
 IDC Housing PC, UL 94V-2  
 IDC Terminal Phosphor Bronze, Tin Plated  
 Compatibility 22-26 AWG Stranded and Solid Wire, compatible with 110 punch down tool

#### Jack Connector

Contact Material PBT, UL 94V-2  
 Contact Finish Phosphor Bronze, Nickel Plated  
 Jack Housing 50µ Gold Plated (Plug contact area)  
 Contact Bracket ABS + PC, UL 94V-0  
 Shield PC, UL 94V-2, Transparent  
 Brass Nickel Plated

#### Printed Circuit Board


Material FR4, UL 94V-0

#### Electrical Properties

Operating Temp. -10° to 60° C  
 Insertion Force 20 N max  
 Retention Strength 17 lbs (Between jack and plug)  
 Jack Life Cycle 750 cycles/min.

#### Standards

ISO/IEC 11801, ANSI/TIA 568.2-D, IEC 60603-7-41

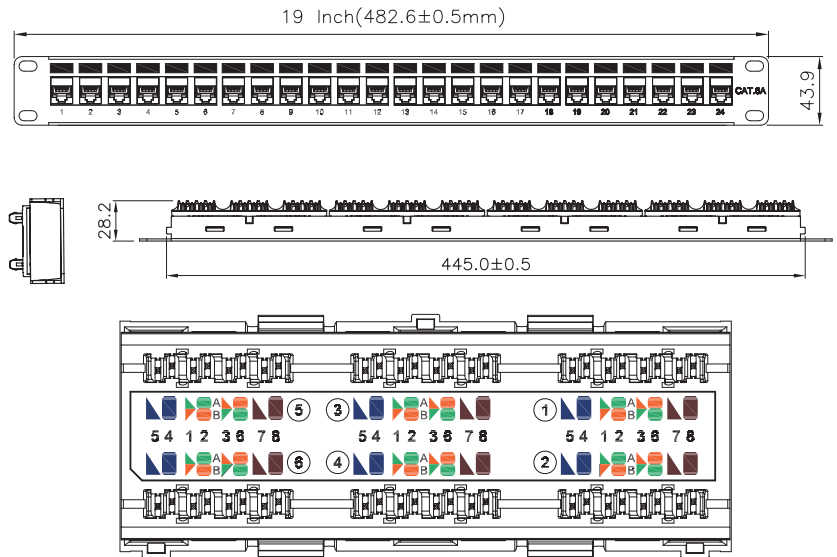

**VERTICAL CABLE**

951.696.7772 California  
 800.749.2447 Florida  
 845.391.8318 New York



verticalcable.com

Rev. 01/2024

Subject to change without notice.