

CAT5E CELL TOWER CABLE

CMX / UV-RESISTANT / 95% TC BRAID

24 AWG 8 CONDUCTOR (F/UTP)



DESCRIPTION

350 MHz CAT5E Cell Tower Cable, Outdoor Dual Jacket, Direct Burial / CMX / Shielded, 4 Twisted Pairs (F/UTP) 8 24-AWG Solid Bare Copper Conductors.

FEATURES

- Supports 10/100/1000BASE-T applications
- Outdoor UV-resistant
- Cell Tower / Direct Burial
- Aluminum Foil & 95% Tinned Copper Braid protects from EMI/RFI
- 350-MHz bandwidth supporting wide range of applications
- 24 AWG Solid Copper Conductors
- Easily identifiable pair insulation colors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- ETL listed



059-496/S2/CWT

TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Pairs:	4
Conductors:	8
Rip Cord:	1
PE Tape:	1
Drain Wire (Tinned Copper):	0.016 in. (0.40 mm)
Braiding (Tinned Copper):	95% Coverage 0.12 in. (3.05 mm)
Screen:	Foiled (F/UTP)

CONDUCTORS

Material:	Solid Bare Annealed Copper
Size:	24 AWG

INSULATION

Material:	PE
Diameter:	0.04 in. (0.91 mm)
Average thickness:	0.0089 in (0.23 mm)
Min. point thickness:	0.0086 in. (0.22 mm)
Color coding:	Pair 1: White-Blue/Blue Pair 2: White-Orange/Orange Pair 3: White-Green/Green Pair 4: White-Brown/Brown

JACKET

Material:	Linear Low Density Polyethylene (LLDPE)
Outdoor rating:	UV-resistant
Outer diameter:	0.29 in. (7.40 mm)
Average thickness:	0.0275 in. (0.70 mm)
Min. point thickness:	0.0250 in. (0.63 mm)
Marking:	VERTICAL 4001453 cETLus VERIFIED STP 4PR 24AWG OUTDOOR CELL TOWER & DIRECT BURIAL UV LLDPE CWT/ S2 CAT5E 350MHz ANSI/TIA-568.2-D RoHS V1379P12760 XXXXFT

ELECTRICAL

Voltage rating:	60 V _{RMS}
-----------------	---------------------

MECHANICAL

Before Tensile Strength (Mpa):	≥10.6 MPa
Elongation After Aging (%):	≥300
Aging Conditions (° C × h):	100x168
Tensile Strength After Aging (Mpa):	≥85% of unaged
Elongation After Aging (%):	≥50% of unaged
Cold Bend (-40±2° Cx4hrs):	No Crack

SAFETY


FPA 70 (NEC®) fire rating:	CMX
----------------------------	-----

ENVIRONMENTAL

Operating temperature:	-40 °F–167 °F (-40 °C–75 °C)
------------------------	------------------------------

WEIGHT

42 lb (19 kg)

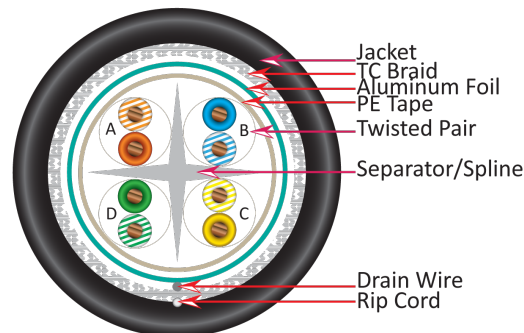

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



verticalcable.com

Rev. 1/2024

Subject to change without notice.