

CAT6 DIRECT BURIAL CABLE

CMX / GEL-FILLED / UV-RESISTANT

23 AWG 8 CONDUCTOR (UNSHIELDED)




DESCRIPTION

550 MHz CAT6, Outdoor UV-resistant Unshielded, Direct Burial / CMX / Gel-Filled, 4 Twisted Pairs (UTP) 8 23-AWG Solid Bare Copper Conductors.

FEATURES

- Supports 10/100/1000BASE-T applications
- Fast Ethernet and 155Mbps TP-PMD/CDDI
- Outdoor UV-resistant
- Direct Burial / Gel-Filled (Flooded Core)
- 550-MHz bandwidth supporting wide range of applications
- 23 AWG Solid Copper Conductors
- Easily identifiable pair insulation colors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications
- CAN/CSA-C22.2 No. 214, RoHS compliant
- ETL listed

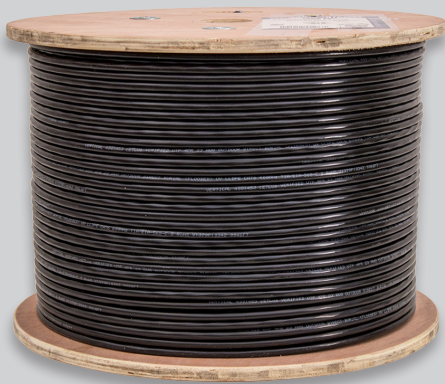

069-560/CMXF

TRANSMISSION PERFORMANCE

Meets or exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 specifications

CONSTRUCTION

Pairs:	4
Conductors:	8
PE Tape:	1
Rip Cord:	Nylon
Gel Filler:	Flooded Core
Separator Material:	Low Density Polyethylene (LDPE)
Screen:	Unscreened (UTP)

CONDUCTORS

Material:	Solid Bare Annealed Copper
Size:	23 AWG

INSULATION

Diameter:	0.0397 in. (1.01 mm)
Average thickness:	0.0098 in. (0.25 mm)
Color coding:	Pair 1: White-Orange/Orange Pair 2: White-Blue/Blue Pair 3: White-Brown/Brown Pair 4: White-Green/Green

JACKET

Material:	Linear Low Density Polyethylene (LLDPE)
Outdoor rating:	UV-resistant
Outer diameter:	0.27 in. (6.80 mm)
Average thickness:	0.0275 in. (0.60 mm)
Min. point thickness:	0.0248 in. (0.55 mm)
Marking:	VERTICAL 4001453 cETLus VERIFIED UTP 4PR 23AWG OUTDOOR DIRECT BURIAL (FLOODED) UV LLDPE CAT6 550MHz ANSI/TIA-568.2-D RoHS V1379P13254 XXXXFT

ELECTRICAL

Voltage rating:	60 V _{RMS}
-----------------	---------------------

MECHANICAL

Before Tensile Strength (Mpa):	≥13.8 MPa
Elongation After Aging (%):	≥100
Aging Conditions (°C × h):	100x168
Tensile Strength After Aging (Mpa):	≥85% of unaged
Elongation After Aging (%):	≥50% of unaged
Cold Bend (-40±2° Cx4hrs):	No Crack

SAFETY


FPA 70 (NEC®) fire rating:	CMX
----------------------------	-----

ENVIRONMENTAL

Operating temperature:	-40 °F–167 °F (-40 °C–75 °C)
------------------------	------------------------------

WEIGHT

33 lb (15 kg)

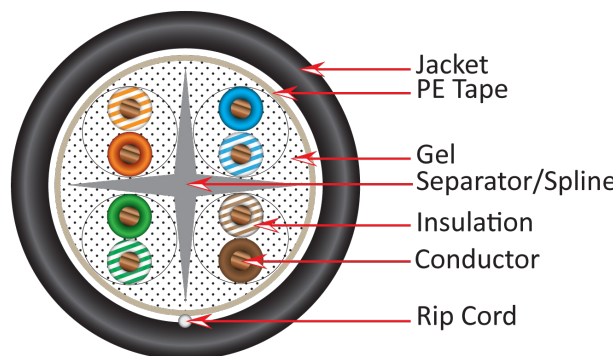

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York

verticalcable.com

Rev. 1/2024

Subject to change without notice.