

DUAL RG6 COAXIAL CABLE

18 AWG CCS STANDARD SHIELD



DESCRIPTION

RG6 Standard Shield, Dual Cable,
18 AWG Solid CCS Conductor,
Shielded with 60% Aluminum Braid.

APPLICATION

- Digital HDTV Applications
- Digital Satellite Installations
- CATV



107-2320/6DSBX

Part Number:	Description:
107-2320/6DSBX	Dual Coaxial Cable, Shielded, 18AWG Copper Clad Steel, Black 500 ft.

CONSTRUCTION

Conductor count: 1
Shape: Round
Braid: 60% Aluminum Alloy
Aluminum Foil: Yes

CONDUCTORS

Material: Solid Copper Clad Steel
Trade size: 18 AWG
Insulation material: Dielectric Foam PE
Insulation O.D.: 0.18 in. (4.60 mm)
Insulation color: White

JACKET

Material: Polyvinyl Chloride (PVC)
O.D.: 0.27 in. (6.90 mm)
Marking: RG6 DUAL 18AWG 60% 3.0 GHz CMG FT4
CATV/CL2 RoHS V1940P10034 XXXFT

MECHANICAL


Temperature rating: 75° C
Sparker Test: 2500V
Impedance: 75 Ohm
Capacitance: 16.2PF/ft
Velocity of Propagation: 83%
Sweep Test: 5MHz-3000MHz
Nominal Delay: 1.21NS/ft
Conductor DC Resistance: 98 Ohms/km
Shield DC Resistance: 34 Ohms/km
Return Loss: (1-470MHz) ≥ 25dB (470-1000MHz) ≥ 22dB
(1000-3000MHz) ≥ 18dB

SAFETY

NFPA 70 (NEC®) rating: CMP/CL2
Voltage rating: 300 V RMS

PACKED WEIGHT

107-2320/6DSBX: 33 lb (15 kg)

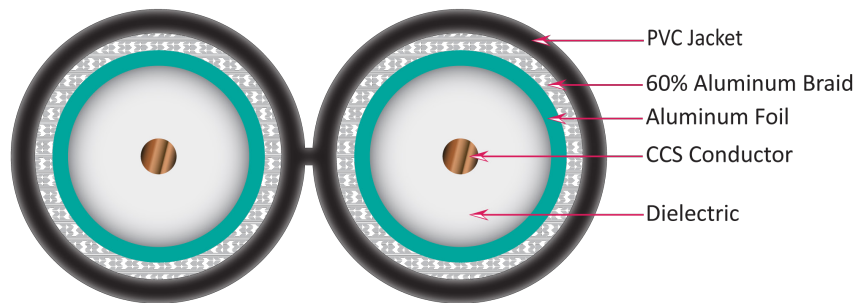

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 12/2023
Subject to change without notice.