

# WORK AREA



## Wall Outlets and Surface-Mount Boxes

### Keystone Modules - Plain













264-KMB0[x]-[yy]-[zz] Optical Fiber Keystone Module


#### Black Bezels

		BEIGE	AQUA	H. VIOLET	BLUE	GREEN
FC	 264-KMB02-01-BK	SC SX  264-KMB01-3A-BK	 264-KMB01-3C-BK	 264-KMB01-3D-BK	 264-KMB01-3Z-BK	 264-KMB01-3Y-BK
ST	 264-KMB02-02-BK	LC DX  264-KMB01-4A-BK	 264-KMB01-4C-BK	 264-KMB01-4D-BK	 264-KMB01-4Z-BK	 264-KMB01-4Y-BK


#### White Bezels


		BEIGE	AQUA	H. VIOLET	BLUE	GREEN
FC	 264-KMB02-01-WH	SC SX  264-KMB01-3A-WH	 264-KMB01-3C-WH	 264-KMB01-3D-WH	 264-KMB01-3Z-WH	 264-KMB01-3Y-WH
ST	 264-KMB02-02-WH	LC DX  264-KMB01-4A-WH	 264-KMB01-4C-WH	 264-KMB01-4D-WH	 264-KMB01-4Z-WH	 264-KMB01-4Y-WH

#### Ivory Bezels

FC	 264-KMB02-01-IV
ST	 264-KMB02-02-IV







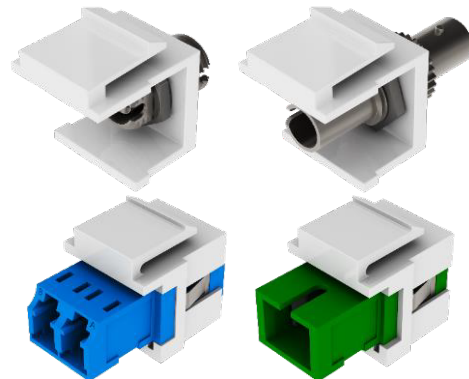

#### Almond Bezels


FC	 264-KMB02-01-AL
ST	 264-KMB02-02-AL



#### Keystone Modules – Shuttered

##### White Bezels

		AQUA	BLUE	GREEN
SC SX		 264-KMB03-3C-WH	 264-KMB03-3Z-WH	 264-KMB03-3Y-WH
LC DX		 264-KMB03-4C-WH	 264-KMB03-4Z-WH	 264-KMB03-4Y-WH

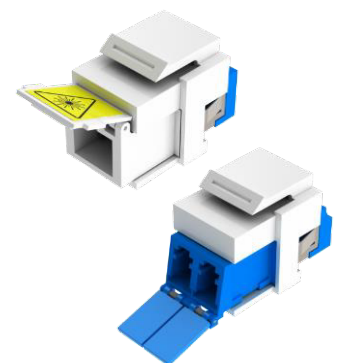

NOTE: Bulk packing is available (any quantities larger than one unit), all units are packed in one bag/box without individual bags, one product label per bag/box. For bulk packing, please, add a note to the order.

# WORK AREA

## Wall Outlets and Surface-Mount Boxes

### Keystone Modules



## CHARACTERISTICS

Compatibility: all Vertical Cable faceplates and surface-mount boxes designed to mount keystone modules (for patch panel compatibility, please, see the note\* following "Mounting dimensions").

Fiber types: SM 9/125;  
MM 50/125;  
MM 62.5/125.


Adapters: Zirconia ceramic split sleeves;  
one-piece body.

Adapter orientation: FC: key rightwards;  
ST, SC, LC: key/latch up.

Insertion loss (IL): 0.3 dB or lower (when used with standard-compliant plugs).

Return loss (RL): UPC:  $\geq 55$  dB (when used with standard-compliant plugs);  
APC:  $\geq 65$  dB (when used with standard-compliant plugs).

Mounting dimensions: White bezel modules White bezel shuttered modules Black bezel modules Bulkhead bezel modules

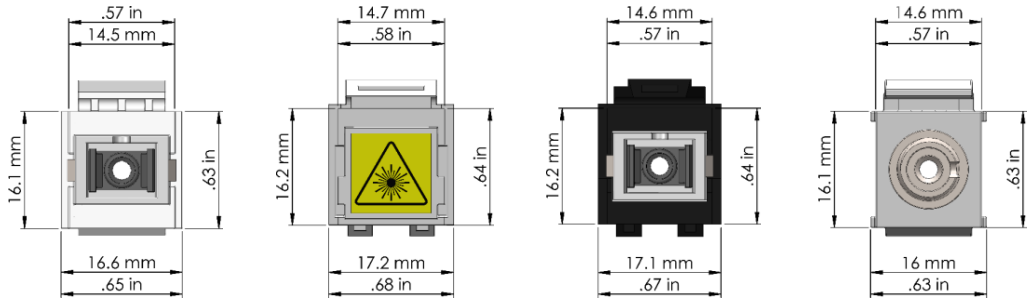

Bezel material: acrylonitrile butadiene styrene (ABS).

Bezel compliance: Regulation (EC) No 1907/2006 (REACH);  
Directive 2011/65/EU Am. 2015/863/EU (RoHS2).

Adapter compliance: IEC 61754-2 (type BFOC/2.5 connector family (ST));  
IEC 61754-4 (type SC connector family);  
IEC 61754-13 (type FC-PC connector family);  
IEC 61754-20 (type LC connector family);  
Regulation (EC) No 1907/2006 (REACH);  
Directive 2011/65/EU Am. 2015/863/EU (RoHS2);  
ANSI/UL 94 V-0.

Environmental: operating temperature:  $-20^{\circ}\text{C}$ – $+70^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$ – $+158^{\circ}\text{F}$ );  
operating humidity:  $\leq 95\%$  RH non-condensing.

## APPLICATIONS

